

ECF

17595-Y

CE

Ø175x75mm(Ø6.89"x2.95")




MOTOR	Die-casting Aluminum
IMPELLER	Glass fiber-reinforced polypropylene
BEARING	Ball
OPERATING TEMPERATURE	-25°C to + 60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	1218g
ROHS COMPLIANCE	Yes
IP LEVEL	IP65(Special IP Rating On Request)

175mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ECF17595V2HB-Y	230	0.95	110	4640	3.55	90.2	458.0	12.96	75.2

DIMENSION

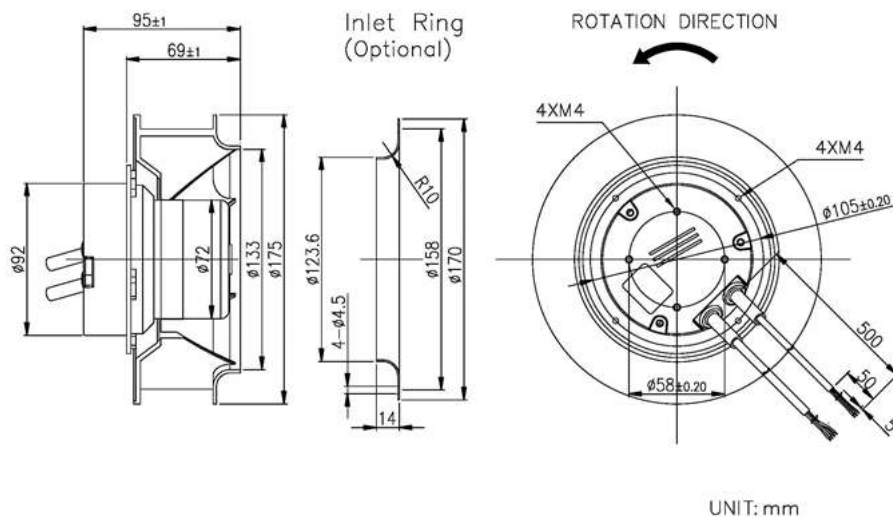

SYMBANG

AIR PERFORMANCE

