

DSB

12674-TK



126x126x74mm(4.96"x4.96"x2.91")



HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-40°C to + 80°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	610 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)




126

mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DSB12674V24HBEX-TK	24	6.5	156	15000	29.6	752	37.3	1.06	71.9

DIMENSION

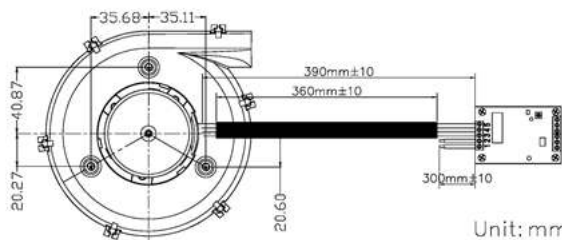

Unit: mm

LEAD WIRE UL1332# 18AWG OR EQUIVALEN

PIN1:BLACK WIRE---(-)

PIN2:RED WIRE---(+)

LEAD WIRE UL1007# 22AWG OR EQUIVALEN

PIN3:BROWN WIRE --- (W)

PIN4:BLUE WIRE --- (V)

PIN5:YELLOW WIRE --- (U)

SYMBANG

AIR PERFORMANCE

