


ECF

19095-Y

CE

Ø190x95mm(Ø7.48"x3.74")

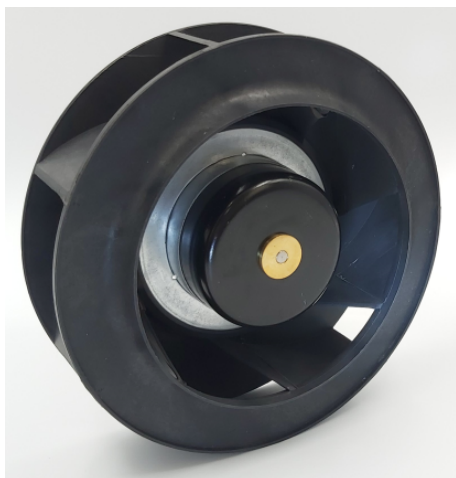


HOUSING	Die-casting Aluminum
IMPELLER	Glass fiber-reinforced polypropylene
BEARING	Ball
INSULATION	Class B
OPERATING TEMPERATURE	-25°C to + 60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	1268g
ROHS COMPLIANCE	Yes
IP LEVEL	IP65(Special IP Rating On Request)

190mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
ECF19095V2HB-Y	230	0.91	106	3770	4.16	105.8	446.0	12.62	72.3

DIMENSION

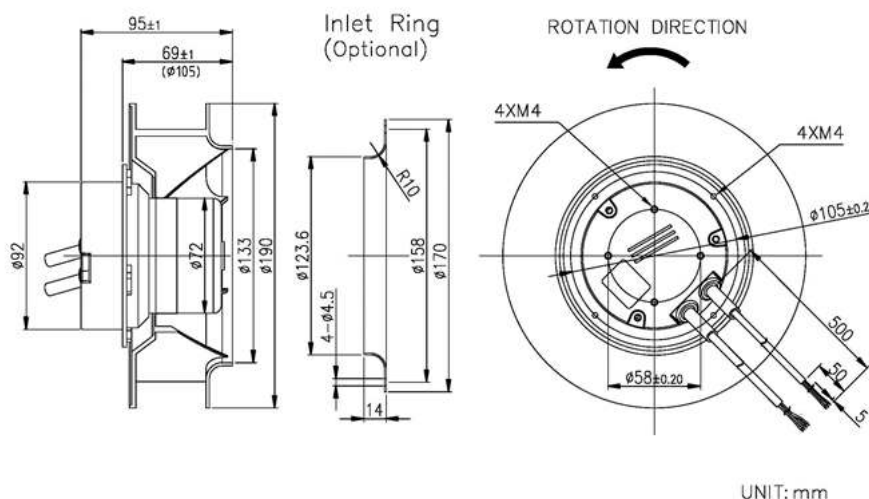

SYMBANG

AIR PERFORMANCE

