

ECF

318181-Y

Ø310x181mm(Ø12.2"x7.13")



HOUSING

Die-casting Aluminum

IMPELLER

Glass fiber-reinforced polypropylene

BEARING

Ball

INSULATION

Class B

OPERATING TEMPERATURE

-25°C to + 60°C

INSULATION RESISTANCE

10M Ω min. @500 VDC

DIELECTRIC STRENGTH

5mA Max. at 500 VAC for 1 minute

WEIGHT

2835g

ROHS COMPLIANCE

Yes

IP LEVEL


IP65(Special IP Rating On Request)

310mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ECF318181V2HB-Y	230	1.25	140	1500	2.43	61.6	1416.0	40.07	66.0

DIMENSION

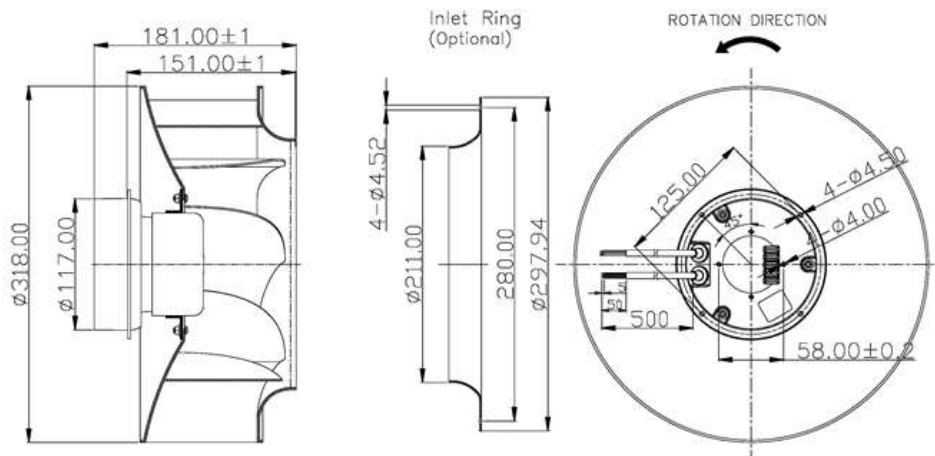

UNIT:mm

SYMBANG

AIR PERFORMANCE

