

DCF 7020-TK



Ø70x20mm(Ø2.76"x0.79")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to +70°
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	97 g
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

70 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCF7020V12HB-TK	12	1	12	9200	1.895	48.1	42.8	1.21	61
DCF7020V24HB-TK	24	0.5	12	9200	1.895	48.1	42.8	1.21	61
DCF7020V48HB-TK	48	0.25	12	9200	1.895	48.1	42.8	1.21	61

DIMENSION

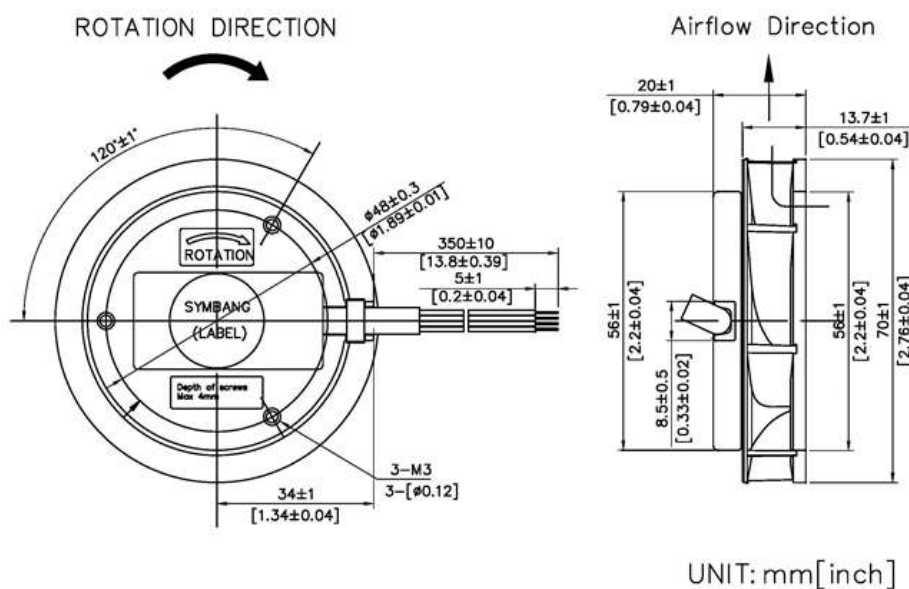

LEAD WIRE:
UL 1007#22AWG OR EQUIVALENT
PIN1: RED WIRE---(+)
PIN2: BLACK WIRE---(-)
PIN3: YELLOW WIRE---(FG)
PIN4: BLUE WIRE---(PWM)



AIR PERFORMANCE

