

DCF

16046-TK

CE

Ø160x46mm(Ø6.3"x1.81")



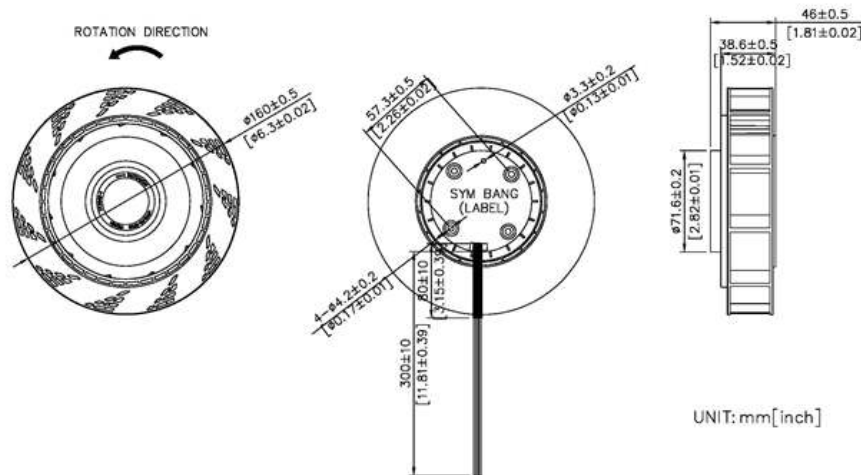
HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to +70°
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	400 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

160mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCF16046V24HB-TK	24	1.60	38.40	3500	2.15	54.6	249.6	7.06	57.9

DIMENSION

LEAD WIRE UL1007#24AWG
OR EQUIVALENT

PIN1: Black WIRE---(-)

PIN2: Red WIRE---(+)

PIN3: Yellow WIRE---(FG)

PIN4: Blue WIRE---(PWM)

SYMBANG

AIR PERFORMANCE

