

D

5025-TK

CE

50x50X25mm(1.97"x1.97"0.98)




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	47 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)

50 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D5025V24L-TK	24	0.15	3.6	11000	0.748	19	31.7	0.897	48.4
D5025V24M-TK	24	0.185	4.44	12000	0.969	24.6	35.5	1.005	52.2
D5025V24H-TK	24	0.25	6	13000	1.083	27.5	37.5	1.062	55.9
D5025V24SL-TK	24	0.28	6.72	14000	1.245	31.6	40.6	1.15	56.8
D5025V12L-TK	12	0.3	3.6	11000	0.748	19	31.7	0.897	48.4
D5025V12M-TK	12	0.37	4.44	12000	0.969	24.6	35.5	1.005	52.2
D5025V12H-TK	12	0.5	6	13000	1.083	27.5	37.5	1.062	55.9
D5025V12SL-TK	12	0.56	6.72	14000	1.245	31.6	40.6	1.15	56.8

DIMENSION

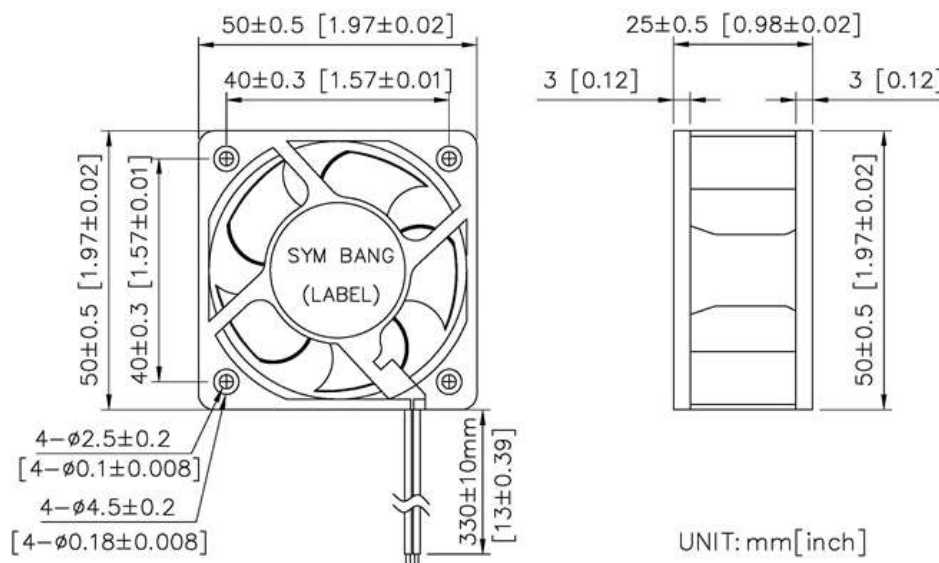

SYMBANG

AIR PERFORMANCE

