

D

6032D-TK

CE

60x60x32mm(2.36"x2.36"x1.26")

HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball of sleeve
OPERATING TEMPERATURE	-10°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	96.5 g
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request


60mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D6032V24MD-TK	24	0.34	8.1	8000	2.131	20.1	45.9	1.005	54.1
D6032V24LD-TK	24	0.26	6.16	7000	2.107	15.7	40.2	1.138	53.5
D6032V48SMD-TK	48	0.4	19.2	11000	2.679	35	60.3	1.707	68
D6032V48SLD-TK	48	0.32	15.12	10000	2.466	29.3	55.2	1.563	62.6
D6032V48LD-TK	48	0.13	6.16	7000	2.107	15.7	40.2	1.138	53.5
D6032V48MD-TK	48	0.17	8.1	8000	2.131	20.1	45.9	1.005	54.1
D6032V48HD-TK	48	0.24	11.28	9000	2.202	23.4	49.5	1.401	55.9
D6032V24HD-TK	24	0.47	11.28	9000	2.202	23.4	49.5	1.401	55.9
D6032V24SLD-TK	24	0.63	15.12	10000	2.466	29.3	55.2	1.563	62.6
D6032V24SMD-TK	24	0.80	19.2	11000	2.679	35	60.3	1.707	68
D6032V12LD-TK	12	0.51	6.16	7000	2.107	15.7	40.2	1.138	53.5
D6032V12MD-TK	12	0.68	8.1	8000	2.131	20.1	45.9	1.005	54.1
D6032V12HD-TK	12	0.94	11.28	9000	2.202	23.4	49.5	1.401	55.9
D6032V12SLD-TK	12	1.26	15.12	10000	2.466	29.3	55.2	1.563	62.6
D6032V12SMD-TK	12	1.6	19.2	11000	2.679	35	60.3	1.707	68

DIMENSION

SYMBANG

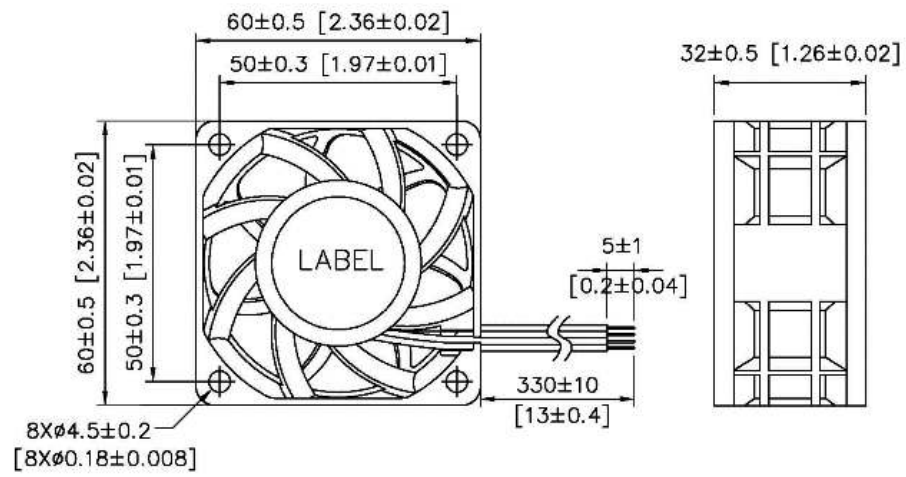

UNIT: mm[inch]

AIR PERFORMANCE

