

DB

9733-TK2

CE

97x95x33mm(3.82"x3.74"x1.3")



HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-30°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	200 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


97 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB9733V24LB-TK2	24	0.45	10.80	4500	1.65	41.83	36.7	1.04	56
DB9733V24MB-TK2	24	0.55	13.20	4850	1.97	49.99	39.2	1.11	57
DB9733V24HB-TK2	24	0.70	16.80	5250	2.45	62.23	43.1	1.22	59
DB9733V24SLB-TK2	24	0.83	19.92	5750	3.05	77.52	47.3	1.34	61
DB9733V24SMB-TK2	24	1.62	38.88	6850	5.14	130.56	56.8	1.61	66
DB9733V24SHB-TK2	24	3.10	74.40	8200	7.83	198.88	65.3	1.85	69
DB9733V12LB-TK2	12	0.90	10.80	4500	1.65	41.83	36.7	1.04	56
DB9733V12MB-TK2	12	1.10	13.20	4850	1.97	49.99	39.2	1.11	57
DB9733V12HB-TK2	12	1.40	16.80	5250	2.45	62.23	43.1	1.22	59
DB9733V12SLB-TK2	12	1.80	21.60	5750	3.05	77.52	47.3	1.34	61
DB9733V12SMB-TK2	12	3.40	40.80	6850	5.14	130.56	56.8	1.61	66
DB9733V12SHB-TK2	12	6.20	74.40	8200	7.83	198.88	65.3	1.85	69
PI#240480	-	-	-	-	-	-	-	-	-

SYMBANG

DIMENSION

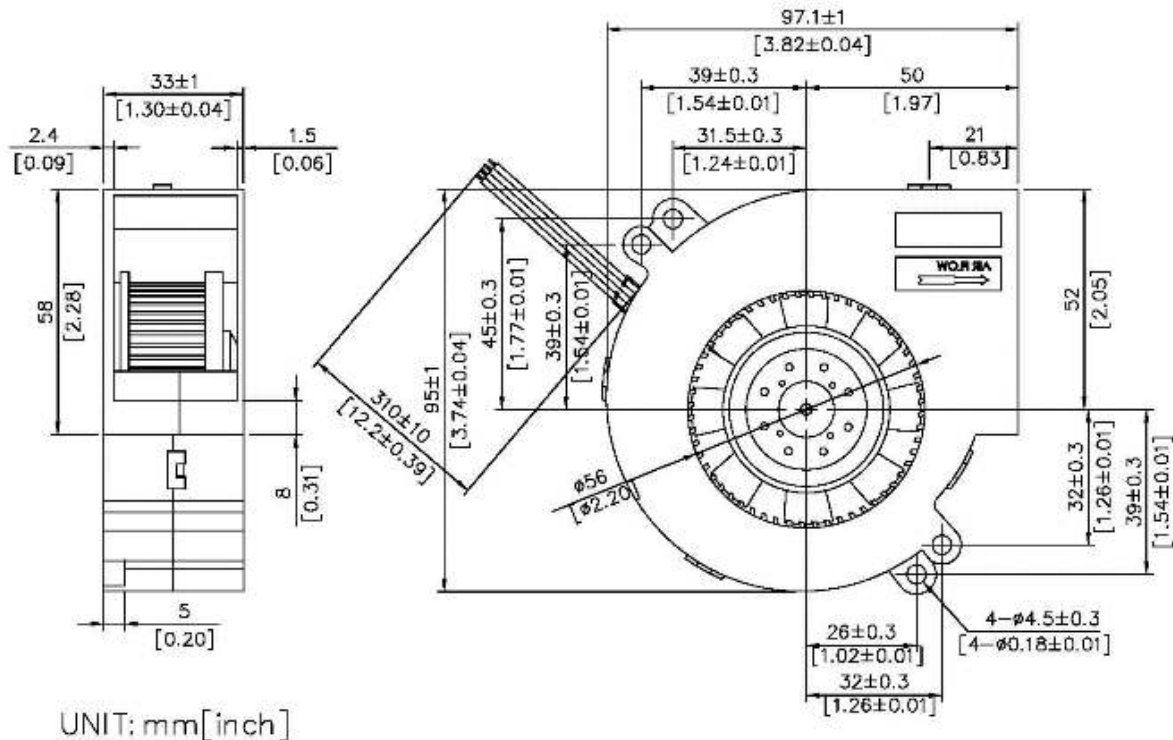

LEAD WIRE

1. READ WIRE -----(-)
2. BLACK WIRE -----(+)
3. BLUE WIRE -----(PWM)
4. YELLOW WIRE -----(FG)

AIR PERFORMANCE

