

D

12536-TK

125x125x36mm(4.92"x4.92"x1.42")

CE




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	228 g
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

125mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D12536V12L-TK	12	0.11	1.32	2200	0.166	4.22	74.29	2.102	35.9

DIMENSION

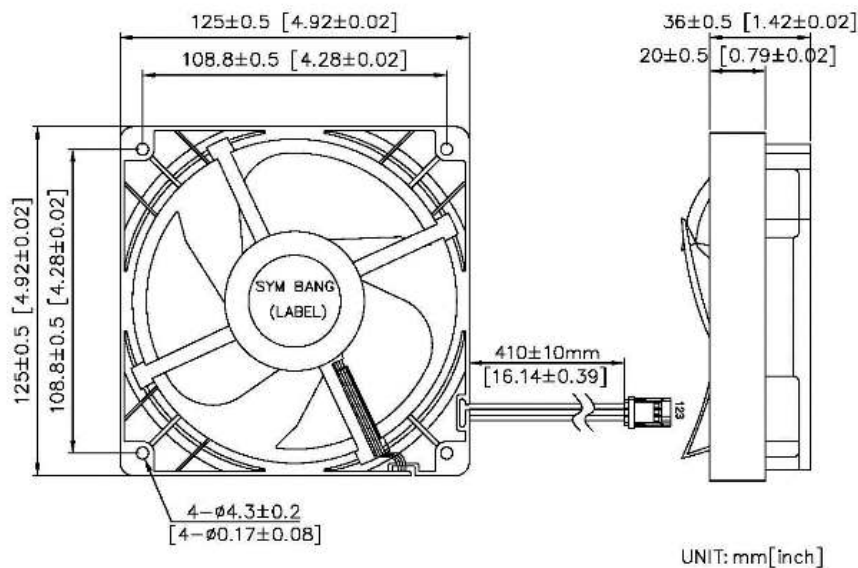

LEAD WIRE

UL1007#26AWG OR EQUIVALENT

PIN1:RED WIRE--(+)

PIN2:YELLOW WIRE--(FG)

PIN3:BLACK WIRE--(-)

SYMBANG

AIR PERFORMANCE

