


DSA

3045-TK



Ø30x44.5mm(Ø1.18"x1.75")

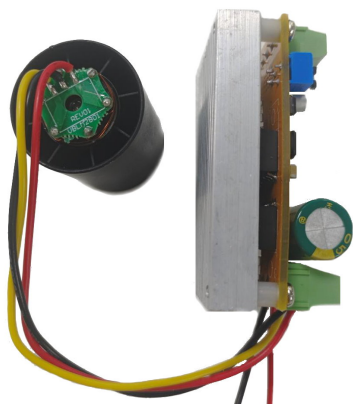

HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-40°C to + 80°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	110 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)


30mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DSA3045V12H-TK	12	2.70	32.40	80000	12.943	328.5	22.2	0.628	67

SYMBANG

DIMENSION

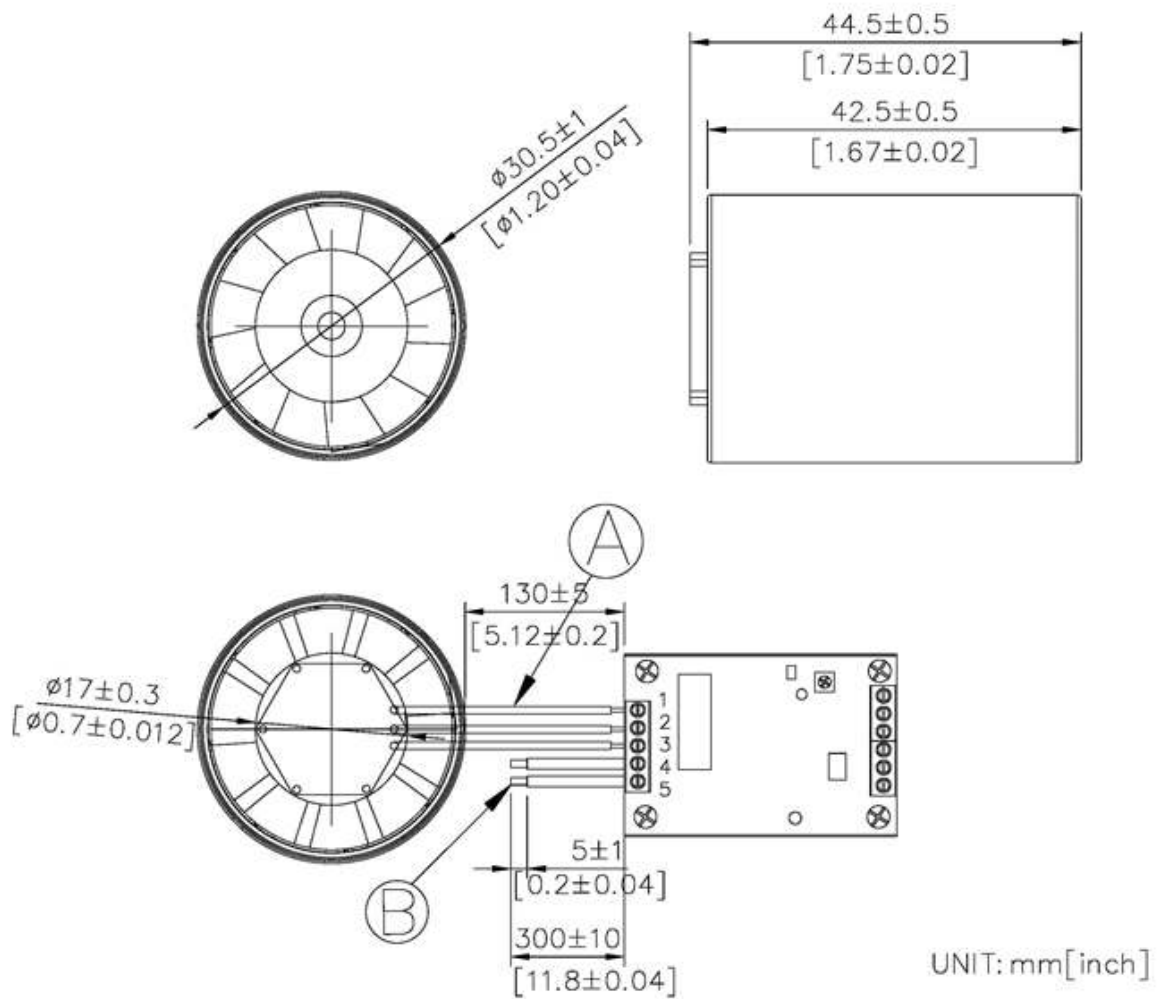

A. Lead Wire UL 1007#22AWG OR Equivalent

1. RED WIRE---(U)
2. BLACK WIRE---(V)
3. YELLOW WIRE---(W)

B. Lead Wire UL 1007#20AWG OR Equivalent

4. RED WIRE---(+)
5. BLACK WIRE---(-)

AIR PERFORMANCE

