

ACF

13373-DQ



Ø133x73mm(Ø5.24"x2.87")




IMPELLER	Plastic
BEARING	Ball
INSULATION	Class F
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-20°C to + 70°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	1,800 VAC for 1 second
SAFETY	Thermally Protected
MOTOR TYPE	AC Induction Capacitor
WEIGHT	720g
ROHS COMPLIANCE	Yes
IP LEVEL	IP54 (Special IP Rating On Request)

133mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ACF13373V2S2P-DQ	230	0.10/0.12	23/27	2100/1800	0.591/0.827	15.0/21.0	62/65	1.75/1.84	62/65
ACF13373V3S2P-DQ	380	0.08/0.08	28/28	1400/1600	0.591/0.827	15.0/21.0	62/65	1.75/1.84	62/65

DIMENSION

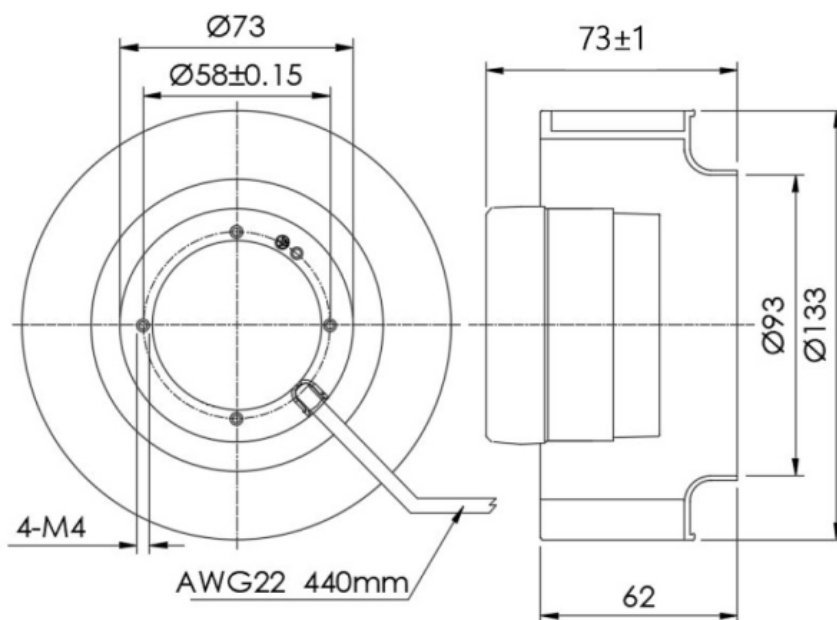

Unit : mm

AIR PERFORMANCE

