

DCF

22271-B

Ø220x65mm(Ø8.66"x2.56")



MOTOR

IMPELLER

BEARING

OPERATING TEMPERATURE

DIELECTRIC STRENGTH

INSULATION RESISTANCE

WEIGHT

ROHS COMPLIANCE

IP LEVEL

Outer rotor motor Ø72mm

Plastic Impeller, Metal Plate

Ball

-40°C to +80°C

10M Ω min. @500 VDC

5mA Max. at 500 VAC for 1 minute

1.35 Kg

Yes

IP44


220

mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCF22271V24HB-B	24	3.2	78	2800	1.60	40.76	468.1	13.24	75
DCF22271V48HB-B	48	1.9	91.2	2700	1.60	40.76	468.1	13.24	75

DIMENSION

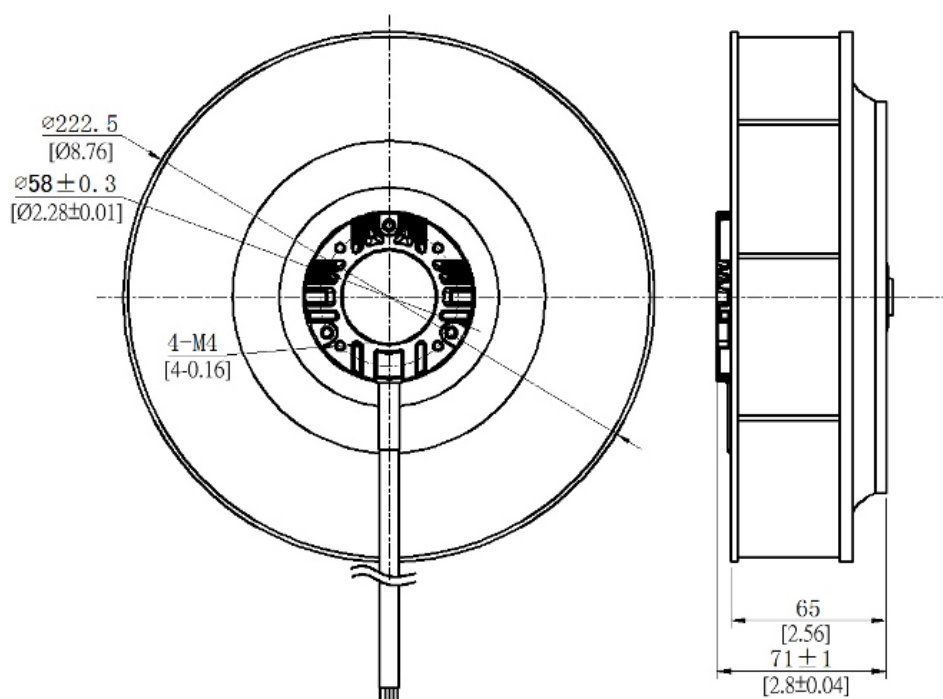

Unit :mm[inch]

SYMBANG

AIR PERFORMANCE

