


D

4056-TP

CE

40x40x56mm(1.57"x1.57"x2.2")

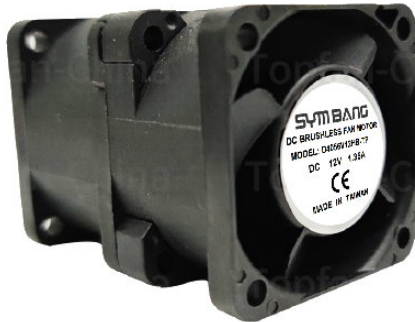


HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-30°C to +80°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	90 g
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

40 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D4056V48H-TP	48	0.34	16.22	12600	2.53	64.22	30.72	0.83	61
D4056V24H-TP	24	0.68	16.2	12600	2.53	64.22	30.72	0.83	61
D4056V12H-TP	12	1.35	16.2	12600	2.53	64.22	30.72	0.83	61

DIMENSION

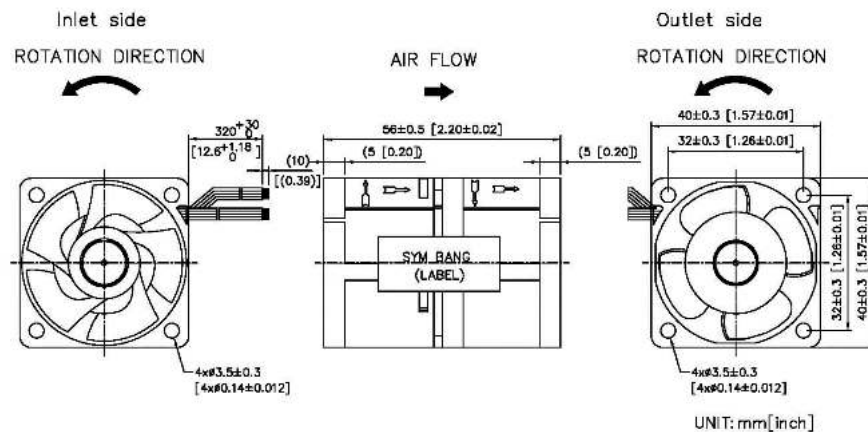

SYMBANG

AIR PERFORMANCE

