

ACF

22599-DQ

CE

Ø225x99mm (Ø8.86"x3.90")




IMPELLER	Plastic
BEARING	Ball
INSULATION	Class F
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-20°C to + 70°C
DIELECTRIC STRENGTH	10M Ω min. @500 VDC
INSULATION RESISTANCE	1800 VAC 1.0mA for 1 Sec
MOTOR TYPE	AC Induction Capacitor Motor
WEIGHT	2500 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP54 (Special IP Rating On Request)

225mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ACF22599V3H2P-DQ	380	0.32/0.43	122/163	2250/2750	1.81/2.75	46/70	595/726	16.82/20.53	68/74
ACF22599V2H2P-DQ	230	0.50/0.80	135/175	2650/3050	2.16/2.91	55/74	700/750	19.79/21.21	73/75

DIMENSION

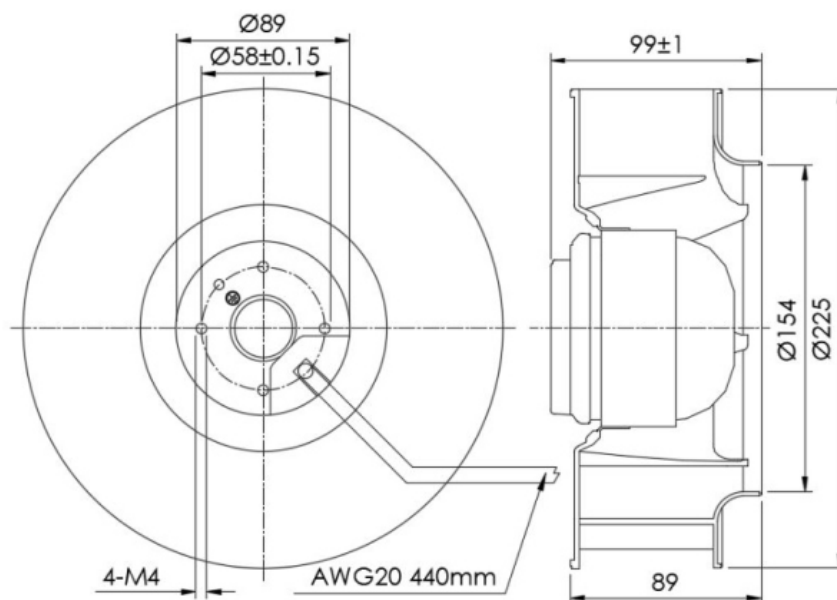

Unit : mm

AIR PERFORMANCE

