

AA

12038-SA

CE

120x120x38mm(4.72"x4.7"x1.5")




HOUSING	Aluminum-Alloy Die Castings ADC12
IMPELLER	Aluminum-Alloy Die Castings ADC12
BEARING	Ball
OPERATING TEMPERATURE	-55°C to +85°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	450 g
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

120mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
AA12038V2H-SA	200	0.2	44	5200	0.72	18.2	195	5.56	66
AA12038V1H-SA	115	0.4	45	5470	1	25.5	200	5.7	60

DIMENSION

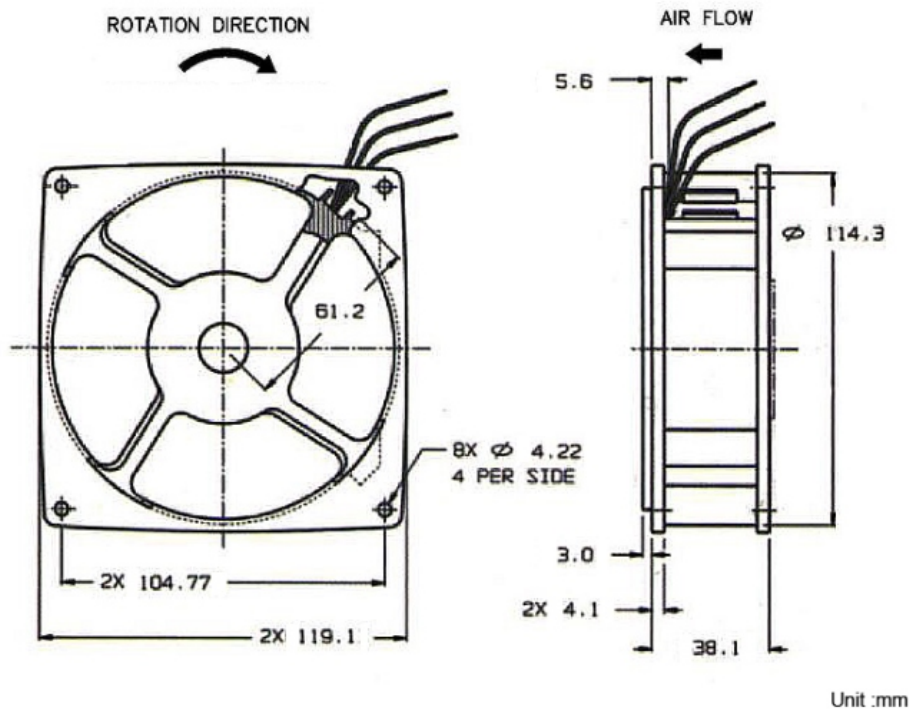

AIR PERFORMANCE

