

AD

8038-SA

80x80x38mm(3.15"x3.15"x1.5")

CE




HOUSING	Aluminum-Alloy Die Castings ADC12
IMPELLER	Aluminum-Alloy Die Castings ADC12
BEARING	Ball
OPERATING TEMPERATURE	-55°C to +85°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	209 g
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

80 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
AD8038V28M-SA	28	0.5	14	5400	0.7	16.8	71.7	2.03	60
AD8038V28H-SA	28	0.65	18.2	6900	1.1	26.9	96	2.72	69

DIMENSION

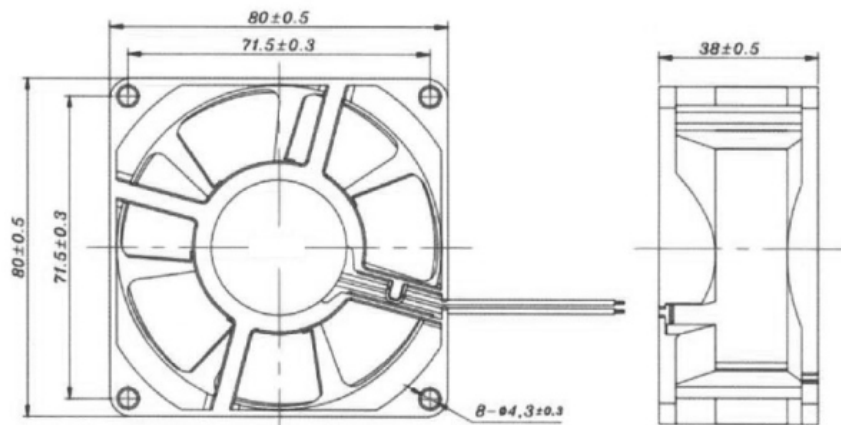

Unit : mm

AIR PERFORMANCE

