

AD

9560-SA

CE

Ø95x60mm(Ø3.74"x2.36")




HOUSING	Aluminum-Alloy Die Castings ADC12
IMPELLER	Aluminum-Alloy Die Castings ADC12
BEARING	Ball
OPERATING TEMPERATURE	-55°C to +85°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	380 g
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

95 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
AD9560V28L-SA	28	0.8	20	7500	1.4	35.7	121	3.42	47
AD9560V28M-SA	28	1.55	44	10000	2.3	58.4	164	4.64	68
AD9560V28H-SA	28	6	153	15000	5.9	150.5	260	7.36	75

DIMENSION

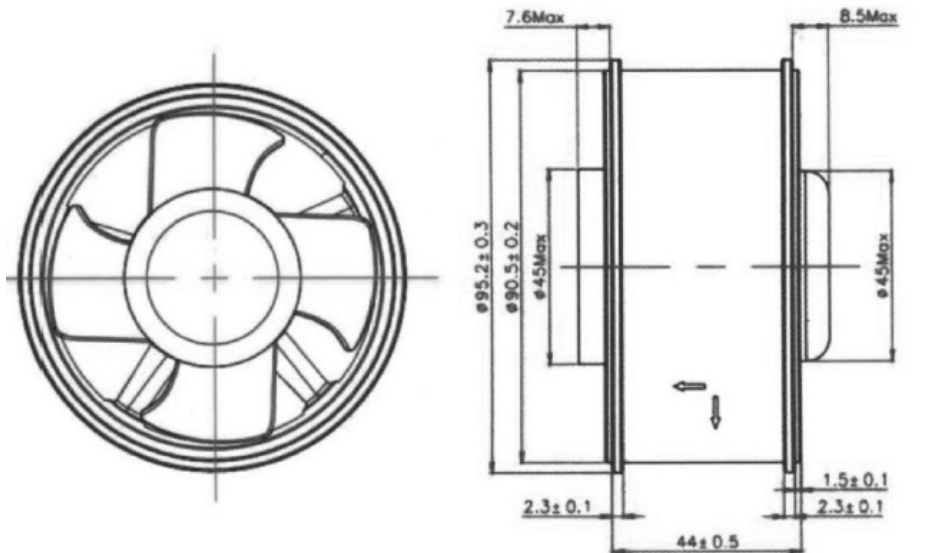

Unit : mm

SYMBANG

AIR PERFORMANCE

