

D

17051-K

CE

Ø172x51mm(Ø6.7"x2")




HOUSING	Aluminum die casting
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to +70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	920 g
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

172mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D17051V48M-K	48	2.6	124.8	8000	3.63	92.2	500	14.16	73
D17051V48H-K	48	3.2	153.6	9500	5.12	130.05	593.75	16.81	77
D17051V24M-K	24	5.8	139.2	8000	3.63	92.2	500	14.16	73
D17051V24H-K	24	6.5	156	9500	5.12	130.05	593.75	16.81	77

DIMENSION

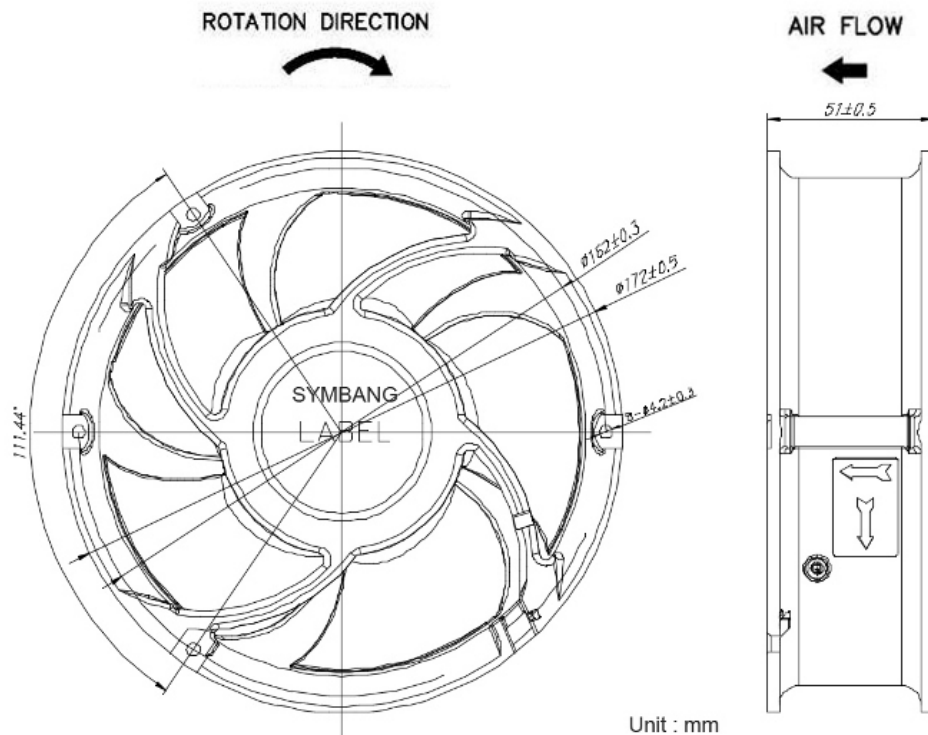

SYMBANG

AIR PERFORMANCE

