

DCF

13363-PB

Ø133x63mm(Ø5.24"x2.48")



MOTOR	Outer rotor motor Ø72mm
IMPELLER	Plastic Impeller
BEARING	Ball
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-25°C to + 60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	550 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


133

mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCF13363V48H-PB	48	0.62	30	4000	1.8	45.88	158.80	4.5	68
DCF13363V24H-PB	24	1.25	30	4000	1.8	45.88	158.80	4.5	68

DIMENSION

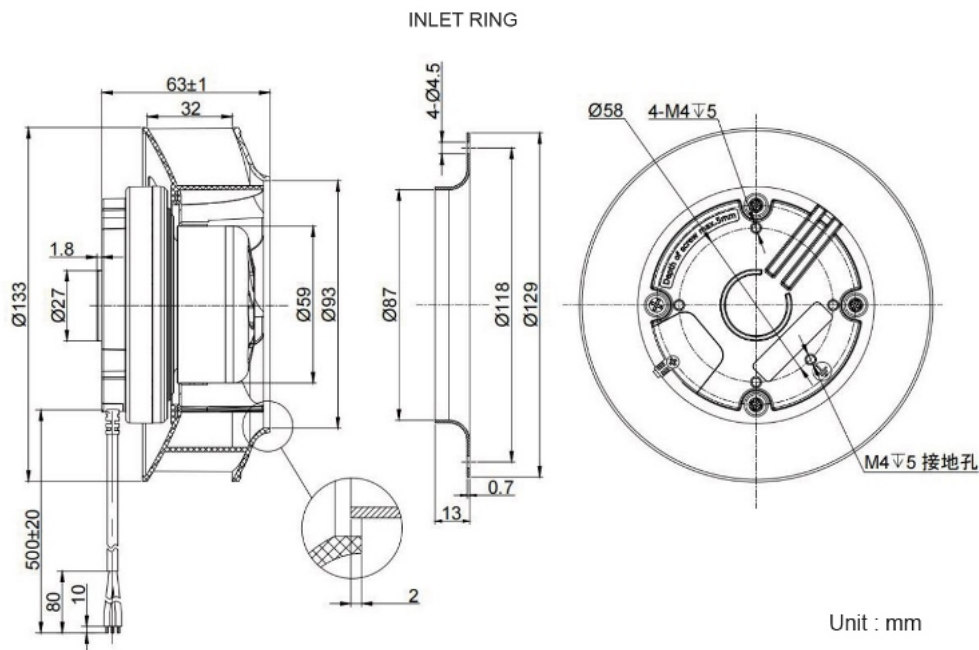

AIR PERFORMANCE

