

AB

147175

CE

147x173x175mm(5.79"x6.81"x6.89")




HOUSING	Steel
IMPELLER	Aluminum
BEARING	Ball
TERMINATION	Lead Wire
OPERATING TEMPERATURE	0°C to + 45°C
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Shaded Pole Motor
ADD TONAL FUNCTION	FG
WEIGHT	2.4 Kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

147 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
AB147175V2HB	220	0.30/0.30	45	2870/3350	0.71/1.02	18/26	78/95	2.2/2.7	62/65
AB147175V1HB	110	0.60/0.55	45	2870/3350	0.71/1.02	18/26	78/95	2.2/2.7	62/65

DIMENSION

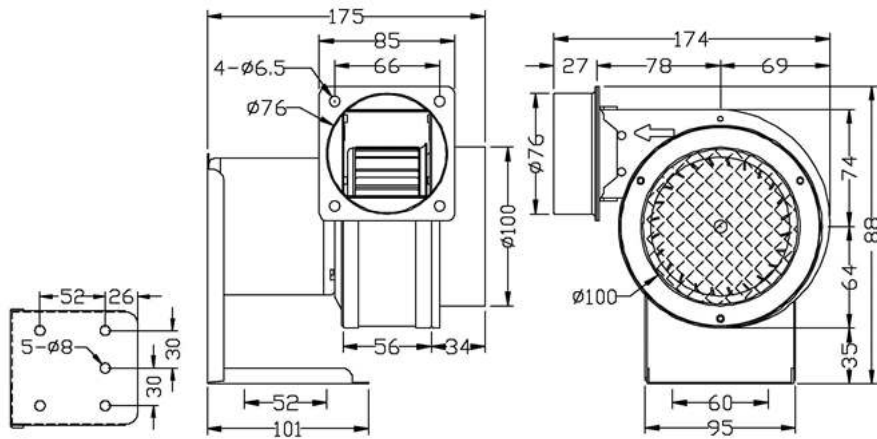

UNIT: mm

SYMBANG

AIR PERFORMANCE

