

AB

195252

CE

195x197x252mm(7.68"x7.76"x9.92")




HOUSING	Steel
IMPELLER	Aluminum
BEARING	Ball
TERMINATION	Lead Wire
OPERATING TEMPERATURE	0°C to + 45°C
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Shaded Pole Motor
ADD TONAL FUNCTION	FG
WEIGHT	4.3 Kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

195mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
AB195252V3H2PT	380	0.3/0.3	91.93	2870/3330	1.46/2.05	37/52	226/258	6.4/7.3	77/81
AB195252V2H2PT	220	0.5/0.5	91.93	2870/3330	1.46/2.05	37/52	226/258	6.4/7.3	77/81
AB195252V2HB	220	0.50/0.65	91.93	2870/3330	1.46/2.05	37/52	226/258	6.4/7.3	77/81
AB195252V1HB	110	1.15/1.35	91.93	2870/3330	1.46/2.05	37/52	226/258	6.4/7.3	77/81

DIMENSION

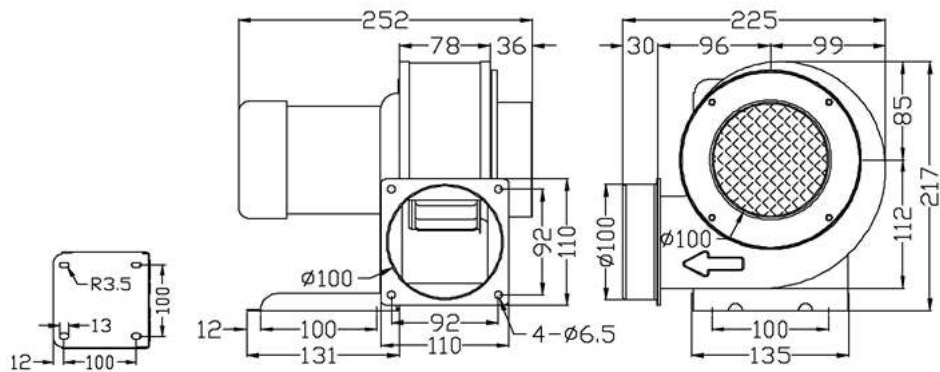

UNIT: mm

SYMBANG

AIR PERFORMANCE

