

AB

297366

297x355x366mm(11.69"x13.98"x14.41")

CE




HOUSING	Steel
IMPELLER	Aluminum
BEARING	Ball
TERMINATION	Lead Wire
OPERATING TEMPERATURE	0°C to + 45°C
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Shaded Pole Motor
ADD TONAL FUNCTION	FG
WEIGHT	22 Kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

297 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
AB297366V3H2PT	380	2.0/2.3	735	2800/3300	3.62/5.12	92/130	759/883	21.5/25	82/86
AB297366V2H2PT	220	3.4/4.0	735	2800/3300	3.62/5.12	92/130	759/883	21.5/25	82/86
AB297366V2HB	220	4.2/5.8	735	2800/3300	3.62/5.12	92/130	759/883	21.5/25	82/86
AB297366V1HB	110	8.2/11.4	735	2800/3300	3.62/5.12	92/130	759/883	21.5/25	82/86

DIMENSION

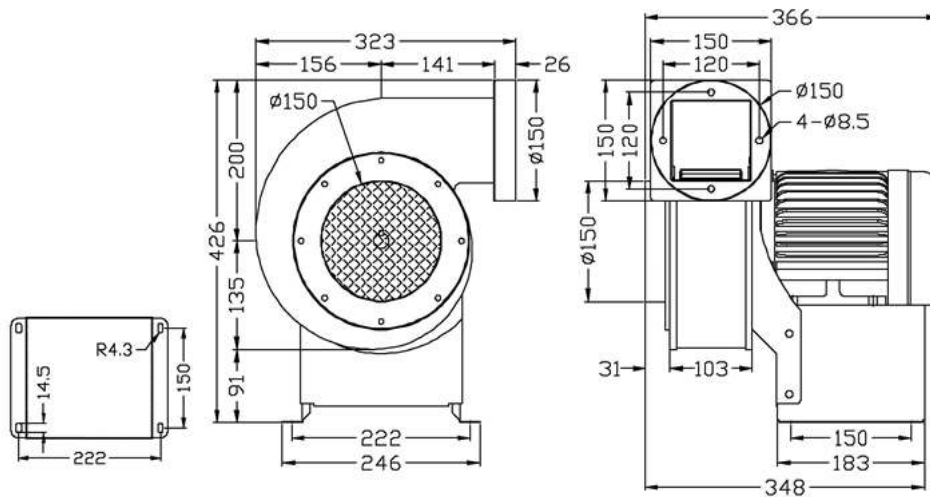

UNIT: mm

AIR PERFORMANCE

