

D

12025D-TK

CE

120x120x25mm(4.72"x4.72"x0.98")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	266 g
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

120mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D12025V48HD-TK	48	0.45	21.6	8300	2.14	54.2	170.2	4.82	69.2
D12025V24HD-TK	24	0.9	21.6	8300	2.14	54.2	170.2	4.82	69.2

DIMENSION

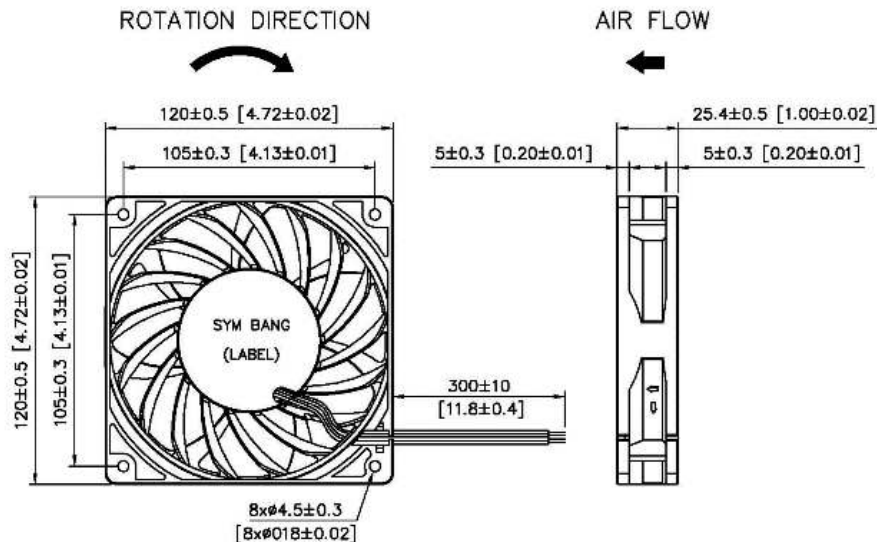

UNIT: mm[inch]

SYMBANG

AIR PERFORMANCE

