

D

25489M-DA

CE

Ø254x89mm(Ø10"x3.5")



HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Metal
BEARING	Ball
OPERATING TEMPERATURE	-10°C to +70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
INSULATION	Class B
WEIGHT	2.55 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP54(Special IP Rating On Request)


254mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D25489V48HM-DA	48	1.36	65.28	2800	0.57	14.6	784	22.19	62
D25489V24HM-DA	24	2.02	48.48	2800	0.57	14.6	784	22.19	62

DIMENSION

SYMBANG

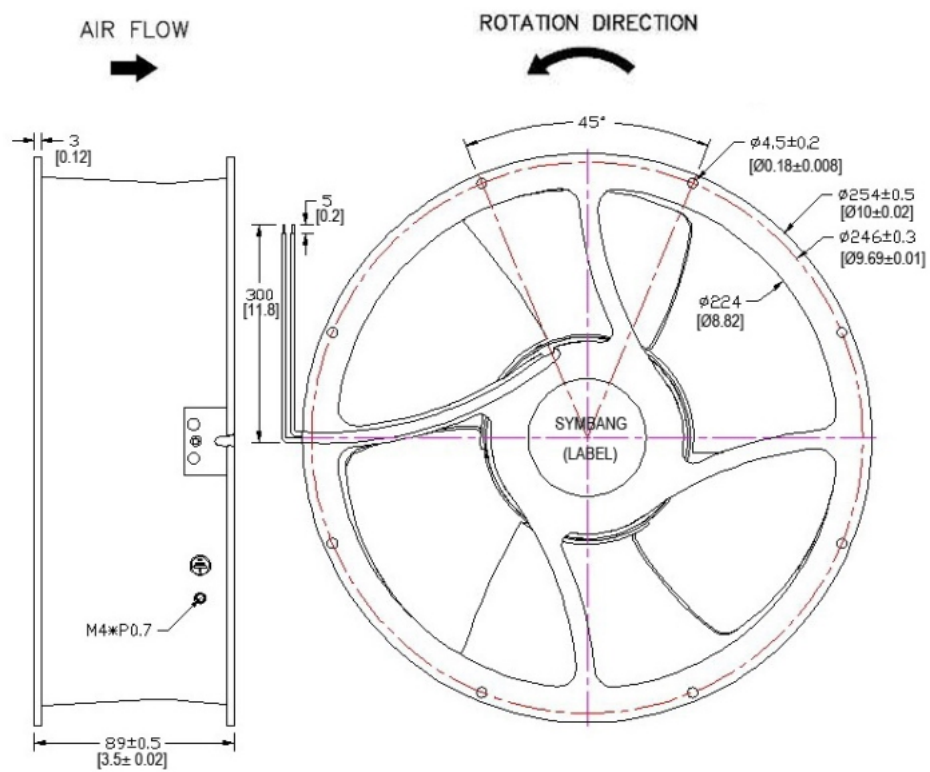

Unit : mm [inch]

AIR PERFORMANCE

