

D

12038-FF

CE

120x120x38mm(4.72"x4.72"x1.50")



HOUSING

Thermoplastic PBT, UL94V-0

IMPELLER

Thermoplastic PBT, UL94V-0

BEARING

Ball or Sleeve

OPERATING TEMPERATURE

-10°C to +70°C

DIELECTRIC STRENGTH

5mA Max. at 500 VAC for 1 minute

INSULATION RESISTANCE

10M Ω min. @500 VDC

WEIGHT

280 g

ROHS COMPLIANCE

Yes

IP LEVEL


Special IP Rating On Request

120mm

SPECIFICATION


MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D12038V48M-FF	48	0.15	7.2	3000	0.319	8.09	108.13	3.06	45
D12038V48H-FF	48	0.2	9.6	3500	0.414	10.51	127.01	3.59	48.6
D12038V48SL-FF	48	0.3	14.4	4000	0.524	13.3	143.9	4.07	52.3
D12038V48SSL-FF	48	0.4	19.2	4500	0.68	17.26	165.39	4.68	55
D12038V24M-FF	24	0.25	6	3000	0.319	8.09	108.13	3.06	45
D12038V24H-FF	24	0.4	9.6	3500	0.414	10.51	127.01	3.59	48.6
D12038V24SL-FF	24	0.55	13.2	4000	0.524	13.3	143.9	4.07	52.3
D12038V24SSL-FF	24	0.7	16.8	4500	0.68	17.26	165.39	4.68	55
D12038V12L-FF	12	0.3	3.6	2500	0.211	5.37	88.51	2.50	40.4
D12038V12M-FF	12	0.5	6	3000	0.319	8.09	108.13	3.06	45
D12038V12H-FF	12	0.8	9.6	3500	0.414	10.51	127.01	3.59	48.6
D12038V12SL-FF	12	1.1	13.2	4000	0.524	13.3	143.9	4.07	52.3

DIMENSION

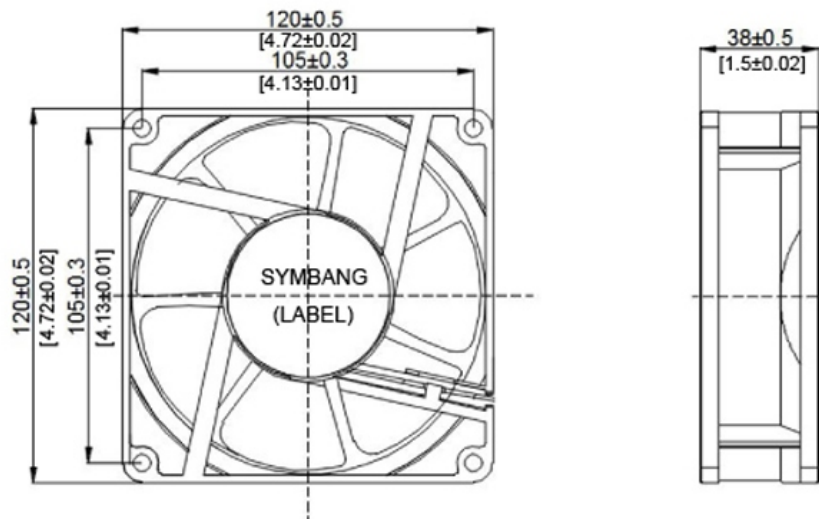

UNIT : mm [inch]

SYMBANG



AIR PERFORMANCE

