

D

5015-LW

CE

50x50x15mm(1.97"x1.97"x0.59")



HOUSING

Thermoplastic PBT, UL94V-0

IMPELLER

Thermoplastic PBT, UL94V-0

BEARING

Ball

OPERATING TEMPERATURE

-40°C to +95°C

DIELECTRIC STRENGTH

5mA Max. at 500 VAC for 1 minute

INSULATION RESISTANCE

10M Ω min. @500 VDC

WEIGHT

34.1 g

ROHS COMPLIANCE

Yes

IP LEVEL


Special IP Rating On Request

50 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D5015V12M-LW	12	0.016	0.19	2200	0.04	0.91	5.5	0.16	17.2
D5015V12H-LW	12	0.031	0.37	3100	0.07	1.77	7.99	0.23	20.7

DIMENSION

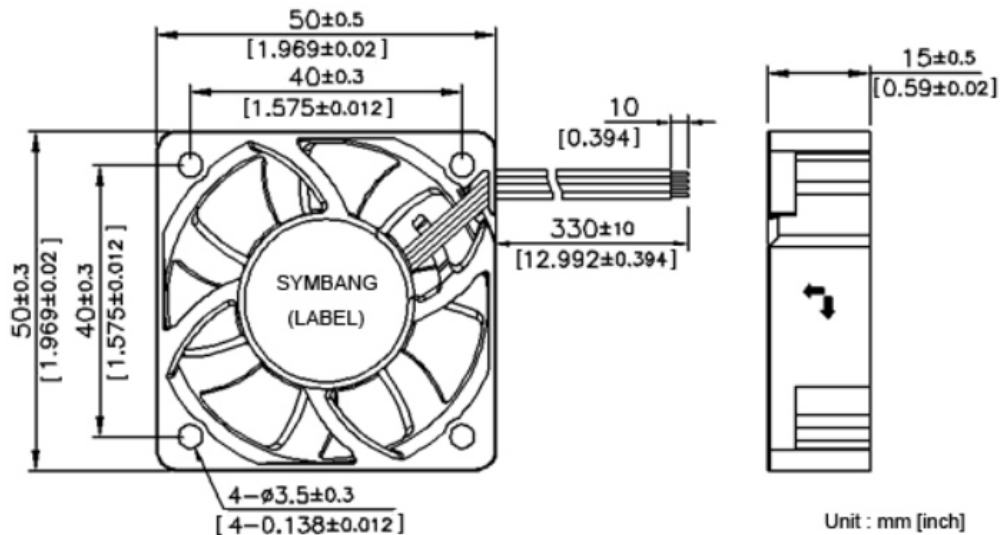

SYMBANG

AIR PERFORMANCE

