

15x15x3mm(0.59"x0.59"x0.12")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve
OPERATING TEMPERATURE	-10°C to +60°C
INSULATION	5mA Max. at 500 VAC for 1 minute
DIELECTRIC STRENGTH	10M Ω min. @500 VDC
INSULATION RESISTANCE	0.92g
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

UL94V-0
AC for 1 minute
DC

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB1503V3XL-LW	3	0.043	0.13	7800	0.05	1.26	0.11	0.003	15.8
DB1503V3L-LW	3	0.094	0.28	13300	0.15	3.9	0.18	0.005	26.8
DB1503V3M-LW	3	0.16	0.48	19500	0.31	7.88	0.27	0.008	34.7
DB1503V3H-LW	3	0.25	0.75	22500	0.41	10.49	0.31	0.009	37.6

DIMENSION

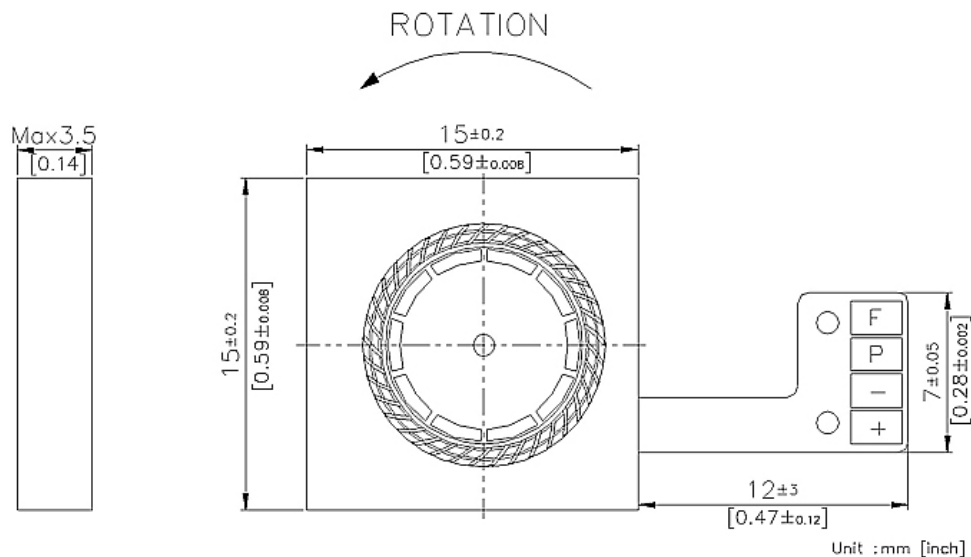

AIR PERFORMANCE

