

HOUSING Aluminum Die Casting, Painted Black

IMPELLER Metal BEARING Ball

OPERATING TEMPERATURE -20°C to +70°C

INSULATION Class A

OPERATING VOLTAGE RANGE 207 VAC to 253 VAC for 230V Type DIELECTRIC STRENGTH 5mA Max. at 1800 VAC for 1 second

INSULATION RESISTANCE $10M~\Omega$ min. @500 VDC MOTOR TYPE Outer Rotor, AC Induction Capacitor

SAFETY Thermally Protected TERMINATION Terminals or Lead Wire


WEIGHT 2 kg ROHS COMPLIANCE

IP LEVEL IP54(optional IP56, IP67 rated)

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE
					inchH2O	mmH2O	CFM	m3/min	dB(A) @1M
A150110V2HBM-DA	220	0.22/0.25	50/57	2800/3200	0.7/0.86	18/22	260/298	7.35/8.4	60/63

DIMENSION

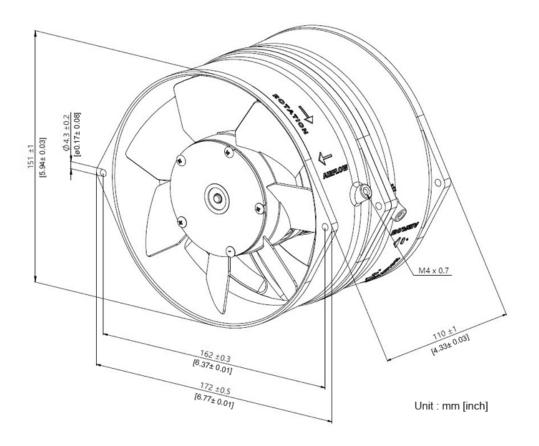

AIR PERFORMANCE

