

A

150110M-DA

151x172x110mm(5.94"x6.77"x4.33")



HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Metal
BEARING	Ball
OPERATING TEMPERATURE	-20°C to +70°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	207 VAC to 253 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1800 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Outer Rotor, AC Induction Capacitor
SAFETY	Thermally Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	2 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP54(optional IP56, IP67 rated)


151

mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A150110V2HBM-DA	220	0.22/0.25	50/57	2800/3200	0.7/0.86	18/22	260/298	7.35/8.4	60/63

DIMENSION

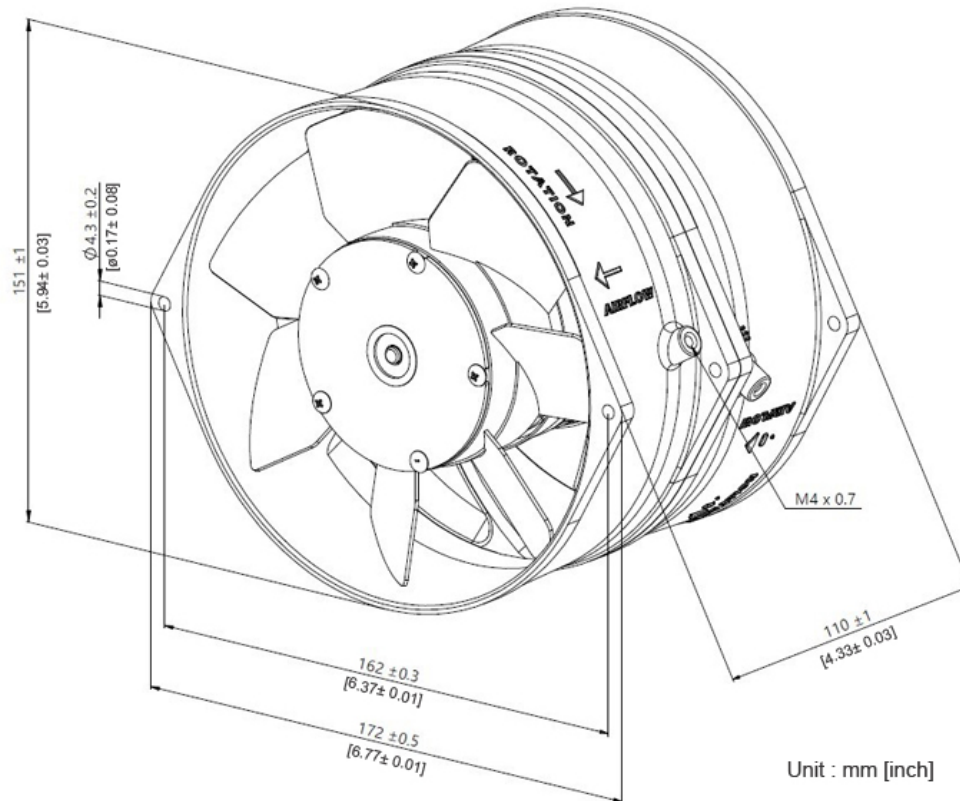

Unit : mm [inch]

SYMBANG

AIR PERFORMANCE

