9733-TK_{1.7x95.7x33.2mm(5.97"x3.77"x1.31")}



HOUSING IMPELLER BEARING DIELECTRIC STRENGTH WEIGHT

OPERATING TEMPERATURE INSULATION RESISTANCE ROHS COMPLIANCE IP LEVEL

Thermoplastic PBT, UL94V-0 Thermoplastic PBT, UL94V-0 Ball

-40°C to +80°C 5mA Max. at 500 VAC for 1 minute 10M Ω min. @500 VDC 300 g


Yes

Special IP Rating On Request

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE
					inchH2O	mmH2O	CFM	m3/min	dB(A) @1M
EB9733V2HV-TK	220	0.83	15	6000	1.71	43.4	20.8	0.59	62.4

DIMENSION

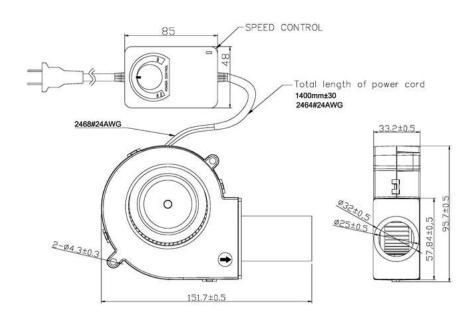

UNIT: mm

AIR PERFORMANCE

