

A

18060M-B

180x180x60mm(7.09"x7.09"x2.36")

CE



HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	SPCC
BEARING	Ball
OPERATING TEMPERATURE	-20°C to +65°C
INSULATION	Class F
OPERATING VOLTAGE RANGE	200 VAC to 240 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1800 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Capacitor inner rotor Motor
SAFETY	Thermally Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	1.6 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP20


180

mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
A18060V2HM-B	230	0.19/0.24	33/40	2750/3100	0.59/0.42	14.8/10.6	364/406	0.41/0.45	62/65

DIMENSION

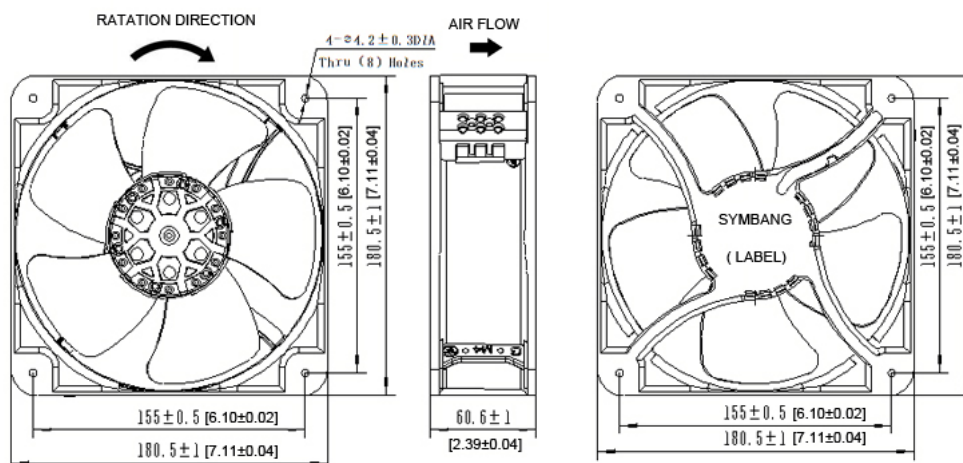

Unit :mm [inch]

SYMBANG

AIR PERFORMANCE

