

DSB

7654-TK



76x64x54mm(2.99"x2.52"x2.13")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-40°C to +80°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	177g
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

76mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DSB7654V24HB-TK	24	2.2	53	35000	30.57	776.0	16.9	0.48	71.8

DIMENSION

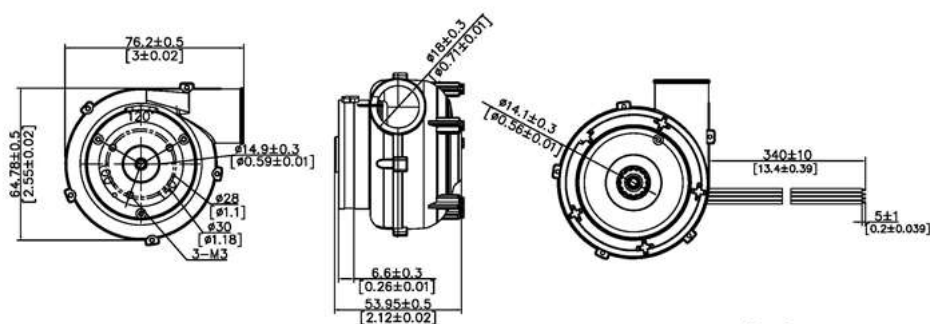

Unit : mm[inch]

LEAD WIRE UL 1007# 22AWGOR EQUIVALENT

- PIN1: BLACK WIRE---(-)
- PIN2: RED WIRE---(+)
- PIN3: YELLOW WIRE---(FG)
- PIN4: BLUE WIRE --- (PWM)

AIR PERFORMANCE

