

ECF

225133

CE

Ø225x133mm(Ø8.86"x5.24")




MOTOR	EC external rotor motor
IMPELLER	Plastic PA66
BEARING	Ball
INSULATION	Class B
OPERATING TEMPERATURE	-25°C to +60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	2.2 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP55

225mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ECF225133V2HB	230		200	3300	2.97	75.4	840.8	23.79	73
ECF225133V1HB	115		200	3300	2.97	75.4	840.8	23.79	73

DIMENSION

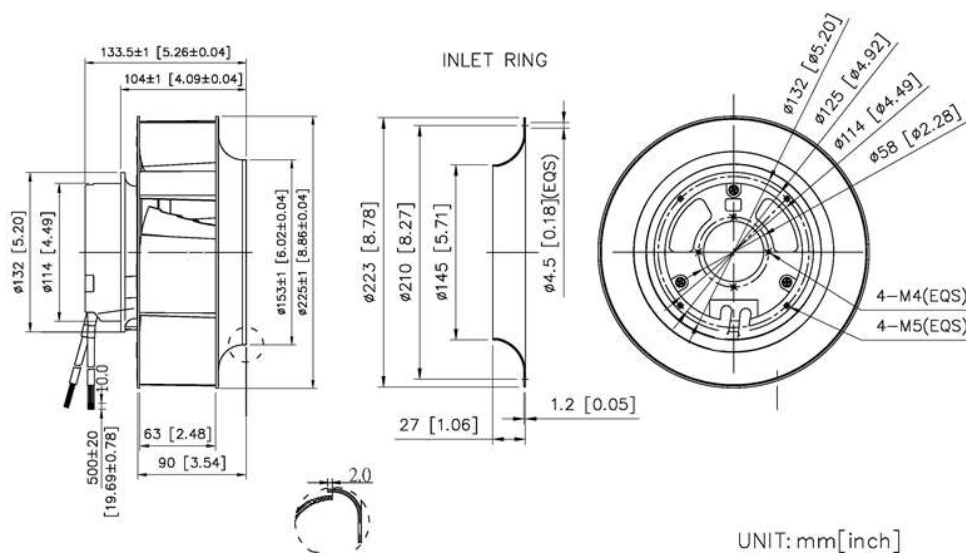

AIR PERFORMANCE

