

D

14038D-YH



140x140x38mm(5.51"x5.51"x1.5")




HOUSING	Thermoplastic PBT, UL94V-0
BEARING	Ball
INSULATION	Class A
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-10°C to +70°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
MOTOR TYPE	DC Brushless Fan Motor
SAFETY	Locked Rotor Protection and Polarity Protection
WEIGHT	166.8 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP55

140mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D14038V48LD-YH	48	0.32	15.4	4500	1.02	26.01	188.3	5.33	66.2
D14038V48MD-YH	48	0.9	43.2	6800	2.46	62.43	297.3	8.41	69.1
D14038V48HD-YH	48	1.38	66.2	8200	3.11	78.84	358.8	10.15	76.9
D14038V24LD-YH	24	0.63	15.1	4500	1.02	26.01	188.3	5.33	66.2
D14038V24MD-YH	24	1.65	39.6	6800	2.46	62.43	297.3	8.41	69.1
D14038V24HD-YH	24	2.72	65.3	8200	3.11	78.84	358.8	10.15	76.9
D14038V12LD-YH	12	1.05	12.6	4500	1.02	26.01	188.3	5.33	66.2
D14038V12MD-YH	12	3.3	39.6	6800	2.46	62.43	297.3	8.41	69.1
D14038V12HD-YH	12	5.4	64.8	8200	3.11	78.8	358.8	10.15	76.9

DIMENSION

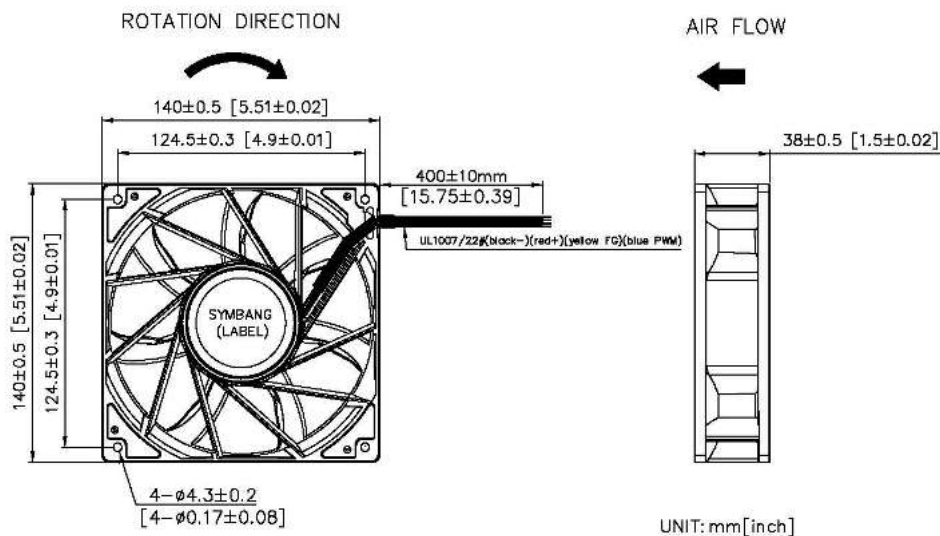

SYMBANG

AIR PERFORMANCE

