


D

4056-GF

CE

40x40x56mm(1.57"x1.57"x2.2")

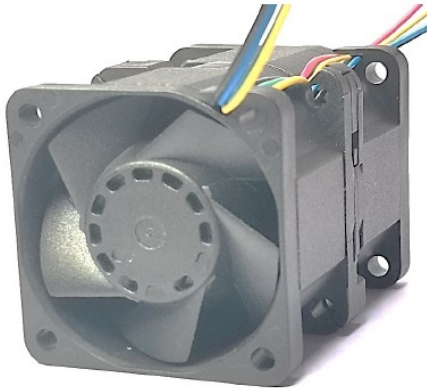


IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
INSULATION	Class A
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-10°C to +70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
MOTOR TYPE	DC Brushless Fan Motor
SAFETY	Locked Rotor Protection and Polarity Protection
WEIGHT	99 g
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

40 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D4056V12LB-GF	12	2.60	31.2	28000/25000	7.68	195.0	33.6	0.95	68.4
D4056V12M-GF	12	2.80	33.6	29000/26000	8.10	205.69	35.0	0.99	69.4
D4056V12H-GF	12	3.00	36.0	30500/28000	8.86	225.0	37.3	1.06	71.3

DIMENSION

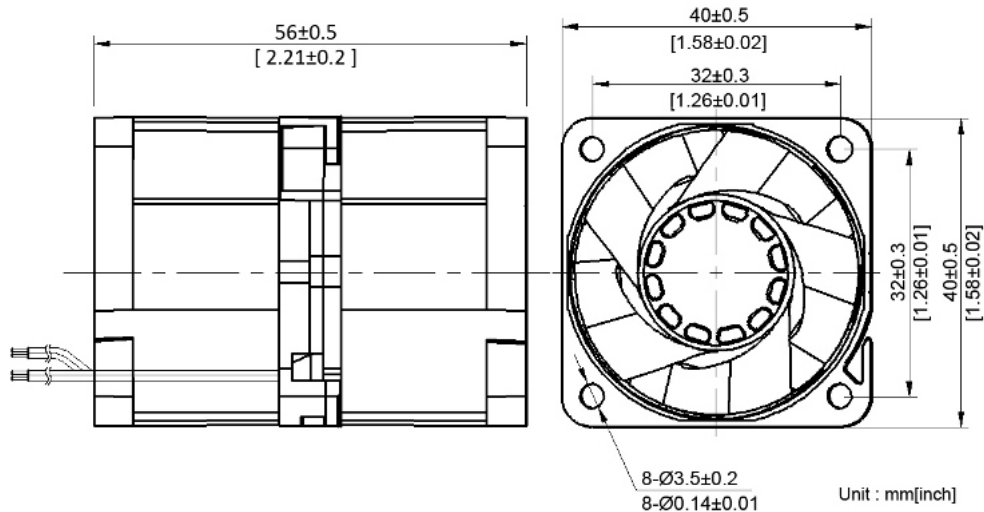

SYMBANG

AIR PERFORMANCE

