

A

12038M-F-FG

CE

120x120x38mm(4.72"x4.72"x1.5")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Metal
BEARING	Ball
OPERATING TEMPERATURE	-40°C to +90°C
INSULATION	Class F
OPERATING VOLTAGE RANGE	103 VAC to 126 VAC for 115V Type
	207 VAC to 253 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Shaded Pole Motor
SAFETY	Impedance Protected
TERMINATION	Lead Wire
WEIGHT	550 g
IP LEVEL	IP21 (Special IP Rating On Request)

120mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A12038V2HM-F-FG	230	0.12/0.1	19/16	2700/3100	0.24/0.26	6.1/6.6	89/103	2.5/2.9	42/46
A12038V1HM-F-FG	115	0.17/0.15	15/13	2700/3100	0.24/0.26	6.1/6.6	89/103	2.5/2.9	42/46

DIMENSION

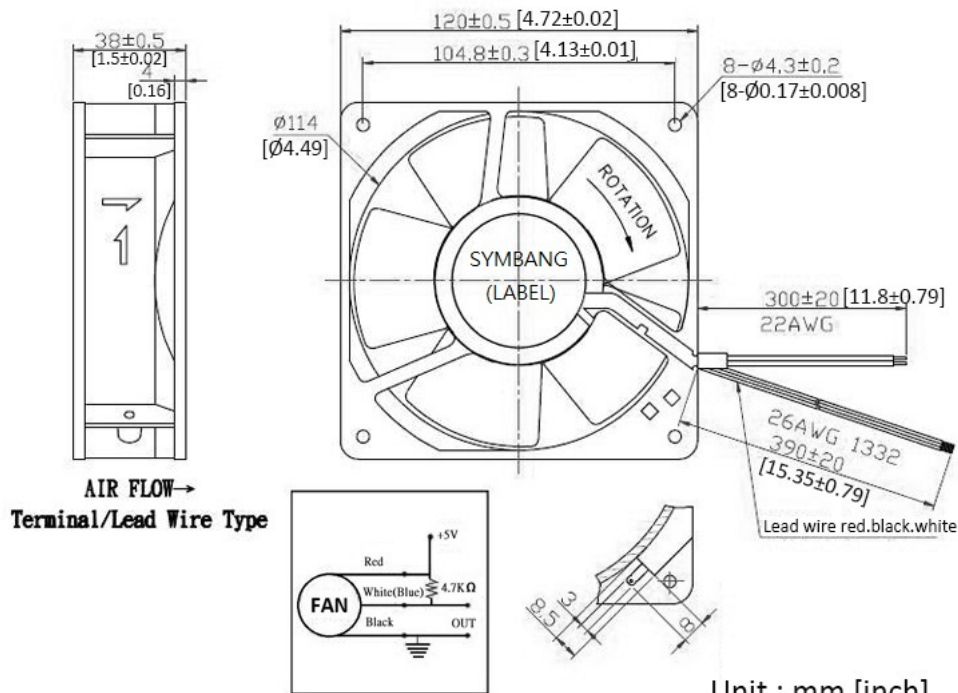

SYMBANG

AIR PERFORMANCE

