

D

20070D-Y

CE

Ø200x70mm(Ø7.87"x2.76")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	PPE+PS+30%GF Black
BEARING	Ball
OPERATING TEMPERATURE	-20°C to +70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	1.5 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)

200mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D20070V48HD-Y	48	10.7	514	8000	5.77	140.79	1093	30.94	81

DIMENSION

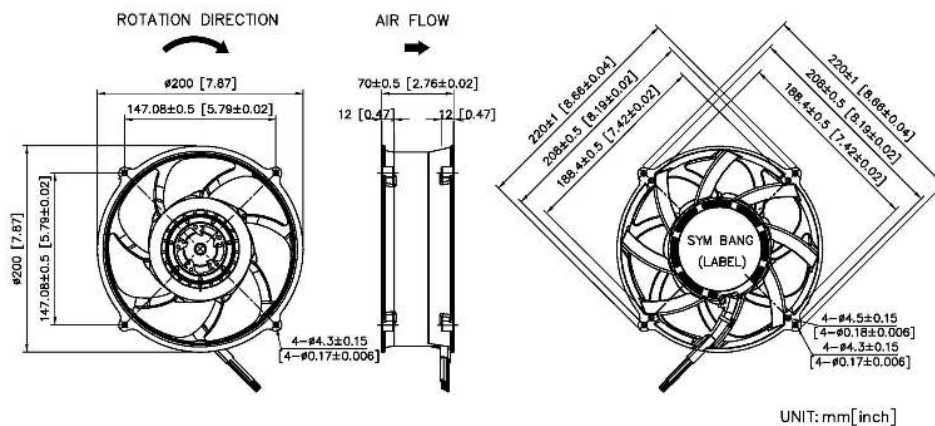

SYMBANG

AIR PERFORMANCE

