

D

20051-Y

CE

220x200x51mm(8.66"x7.87"x2.01")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	PPE+PS+30%GF Black
BEARING	Ball
OPERATING TEMPERATURE	-20°C to +70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	990 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)

220mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D20051V48H-Y	48	2.5	120	6500	4.84	122.94	693	19.61	75

DIMENSION

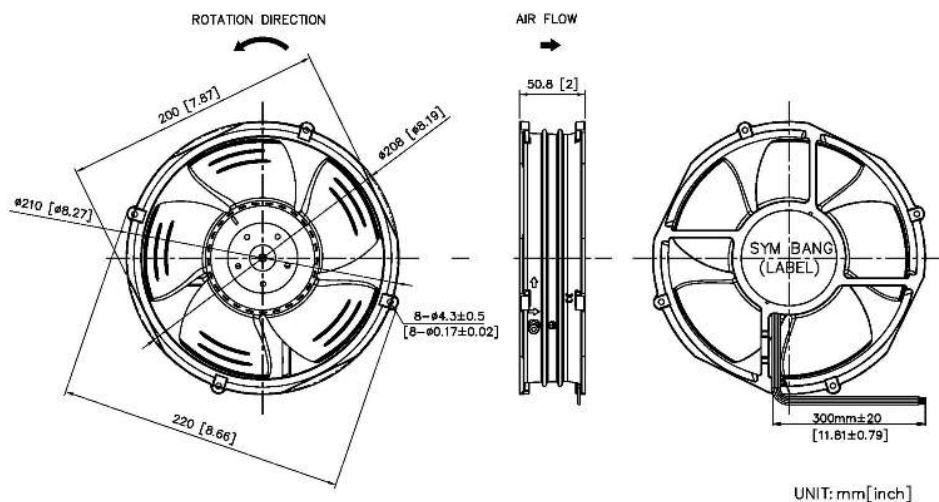

SYMBANG

AIR PERFORMANCE

