

DCF

10025-Y

Ø100x25mm(Ø3.94"x0.98")



HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to +70°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	130g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


100

mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
DCF10025V24M-Y	24	0.55	13.2	5200	1.73	43.86	54	1.53	57.5
DCF10025V24H-Y	24	0.85	20.4	6400	2.54	64.36	62	1.76	63.5

DIMENSION

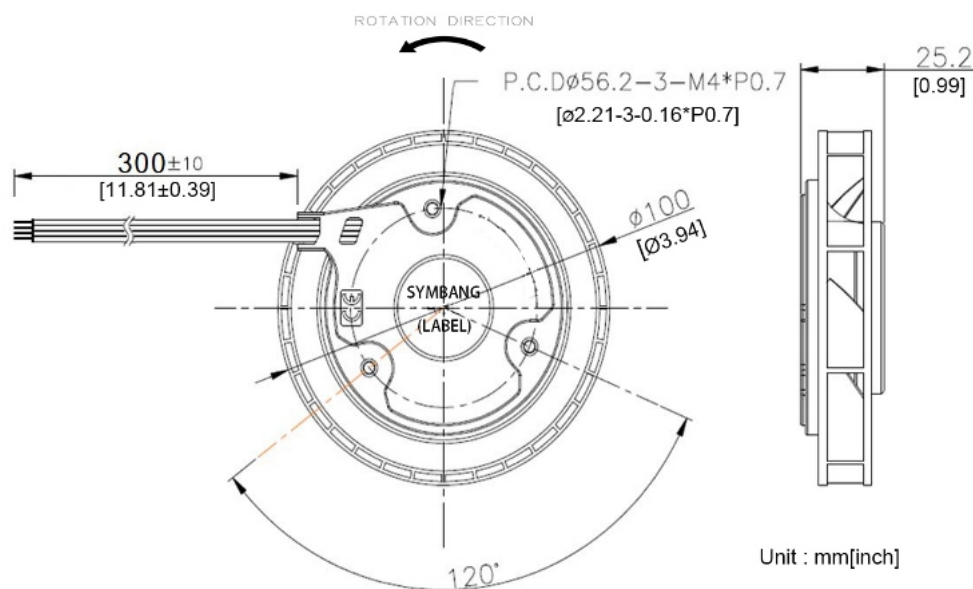

SYMBANG

AIR PERFORMANCE

