

D

1504-AI

CE

15x15x4mm(0.59"x0.59"x0.16")




HOUSING	Thermal Plastic, UL94V-0
IMPELLER	Thermal Plastic, UL94V-0
BEARING	FDB
OPERATING TEMPERATURE	-10°C to +60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	0.9 g
ROHS COMPLIANCE	Yes

15 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D1504V5LX-AI	5	0.05	0.3	13000	0.06	1.60	0.22	0.006	12.0
D1504V5MX-AI	5	0.08	0.4	23000	0.10	2.65	0.31	0.009	27.4
D1504V5HX-AI	5	0.12	0.6	28000	0.14	3.64	0.42	0.012	33.9

DIMENSION

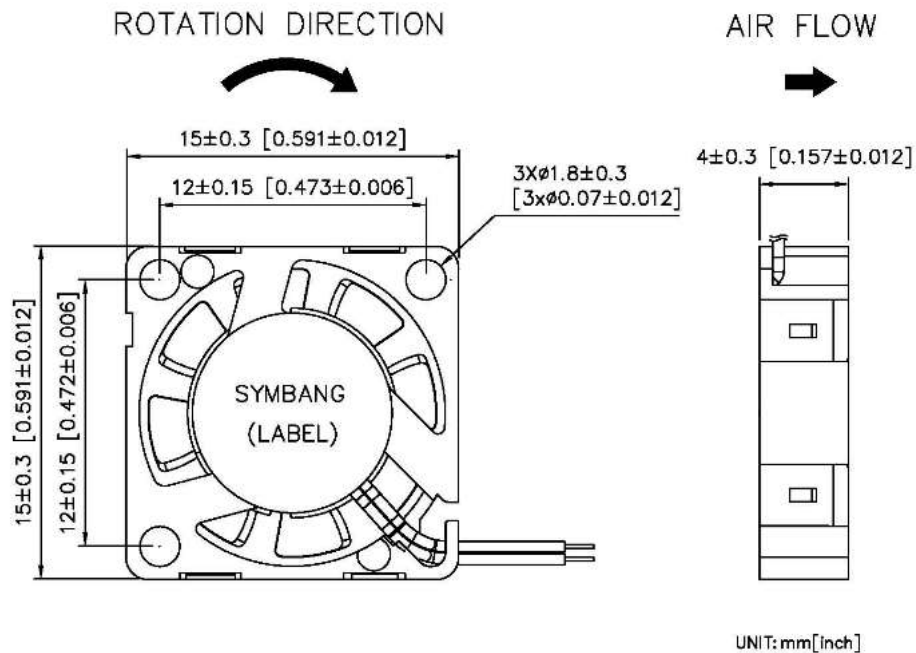

SYMBANG

AIR PERFORMANCE

