

DB

12728-Y

CE

127x127x28mm(5"x5"x1.1")




HOUSING	Housing: PC+ABS; Housing bottom plate: SECC
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to +60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	320g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

127 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB12728V24H-Y	24	0.85	20.4	6400	3.30	83.76	51.00	1.443	64.5

DIMENSION

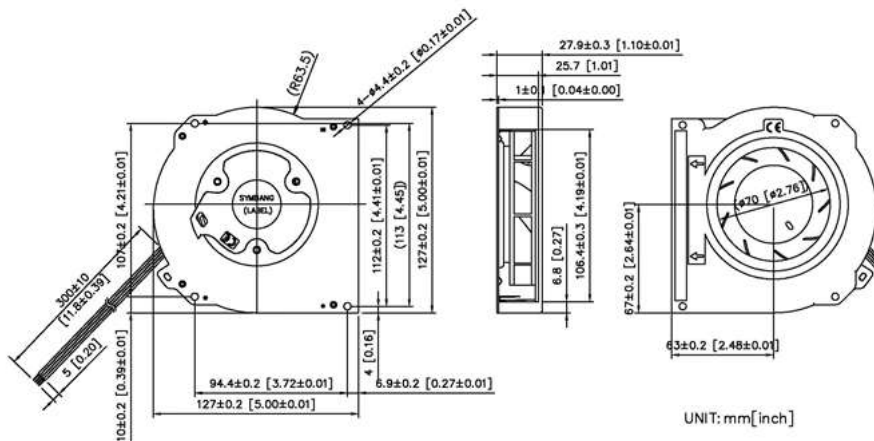

NOTE :
LEAD WIRES : WIRE UL 1007#24AWG
1. RED WIRE----(+)
2. BLACK WIRE---(-)
1. BLUE WIRE---(PWM)
1. YRLOW WIRE- (FG)

SYMBANG

AIR PERFORMANCE

