ACB 238182-P

254x182x172mm(10"x7.17"x6.77")

MOTOR	AC Capacitor Motor
HOUSING	Steel Painted Black Scroll
IMPELLER	Steel
BEARING	Ball
INSULATION	Class F
OPERATING TEMPERATURE	-30°C to +65°C
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
SAFETY	Thermally Protected
WEIGHT	4.15 Kg
ROHS COMPLIANCE	YES

254mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ACB238182V2HB-P	220	1.2/1.2	257/262	1520/1330	1.48/1.33	37.73/33.95	411.76/370.5	11.66/10.5	60
ACB238182V1HB-P	110	1.7	200	1500	1.48	37.73	411.76	11.66	60

DIMENSION

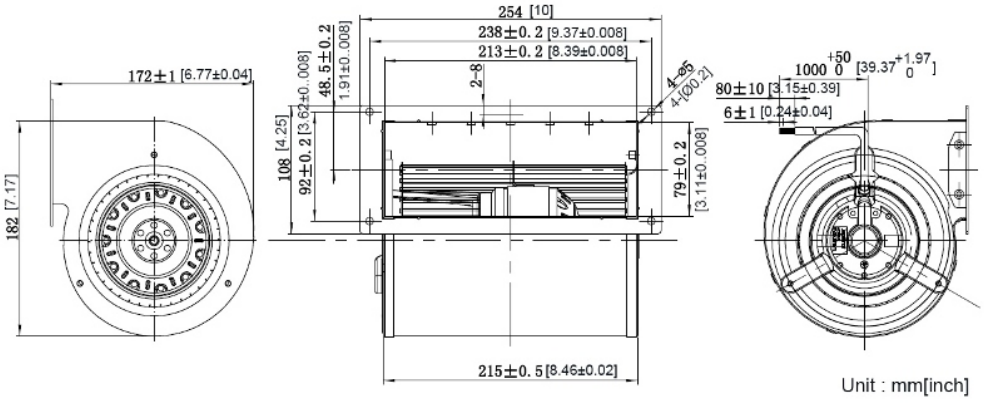

SYM BANG

AIR PERFORMANCE

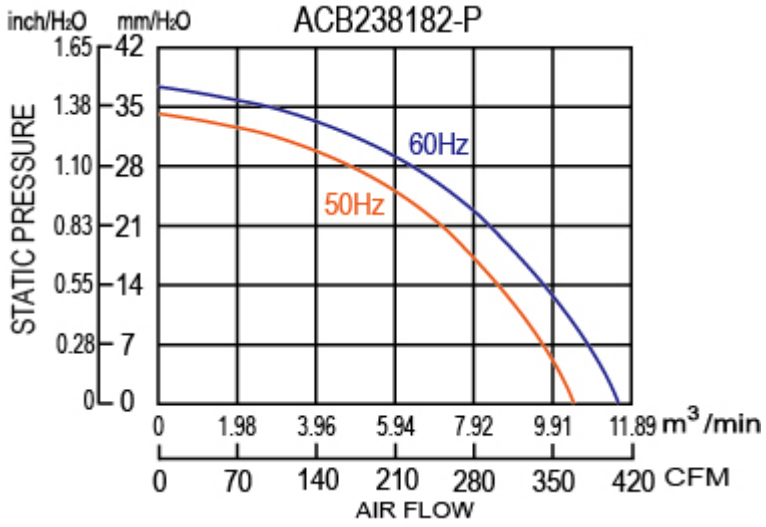

SYM BANG