

A

17238M

CE

172x151x38mm(6.8"x5.9"x1.5")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Metal
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type
	185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Outer Rotor, AC Induction Capacitor Motor
SAFETY	Thermally Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	820 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)

172mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A17238V1HBM	115	0.25/0.21	27/25	2700/3100	0.53/0.57	13.5/14.5	210/240	5.94/6.79	52/58
A17238V2HBM	230	0.11/0.12	26/27	2700/3100	0.53/0.57	13.5/14.5	210/240	5.94/6.79	52/58

DIMENSION

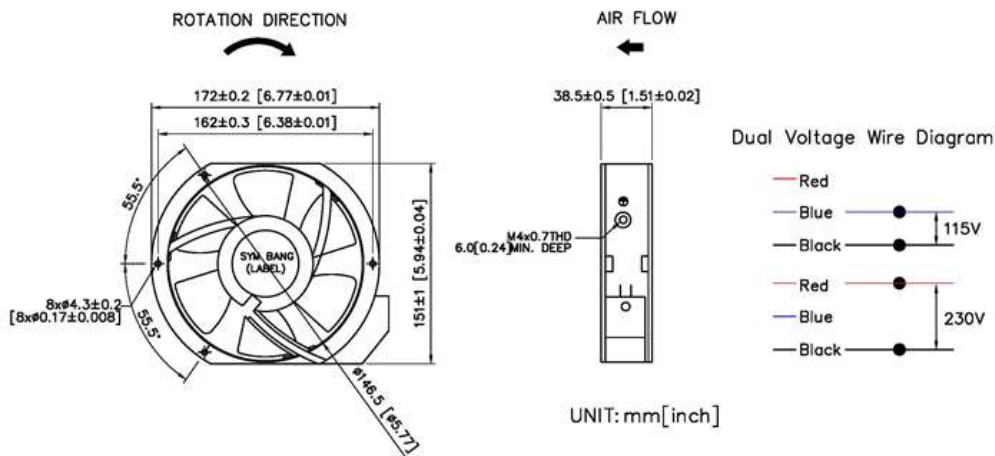

SYMBANG

AIR PERFORMANCE

