


22056

CE

220x220x56mm(8.66"x8.66"x2.2")

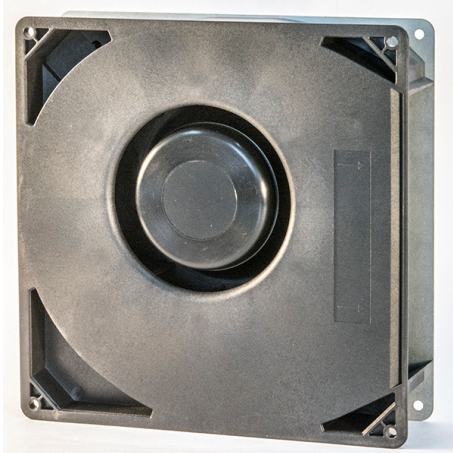

HOUSING

Spiral Housing of Fiberglass Reinforced Polycarbonate

IMPELLER

Housing Base of Galvanized Steel Plate

BEARING

Fiberglass Reinforced polycarbonate

OPERATING TEMPERATURE

Ball or Sleeve

INSULATION

-10°C to + 70°C

OPERATING VOLTAGE RANGE

Class A

DIELECTRIC STRENGTH

85 VAC to 125 VAC for 115V Type

INSULATION RESISTANCE

185 VAC to 245 VAC for 230V Type

MOTOR TYPE

5mA Max. at 1500 VAC for 1 second

SAFETY

AC Induction Capacitor Motor

TERMINATION

Thermally Protected

WEIGHT

Lead Wire

ROHS COMPLIANCE

1.75kg

IP LEVEL


Yes

IP21 (Special IP Rating On Request)

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
AB22056V1HBL	115	0.34/0.42	37/45	2900/3300	1.34/1.87	34.03/47.50	103/117	2.92/3.32	64/66
AB22056V2HBL	230	0.16/0.20	36/44	2900/3300	1.34/1.87	34.03/47.50	102.4/125	2.9/3.54	64/66

DIMENSION

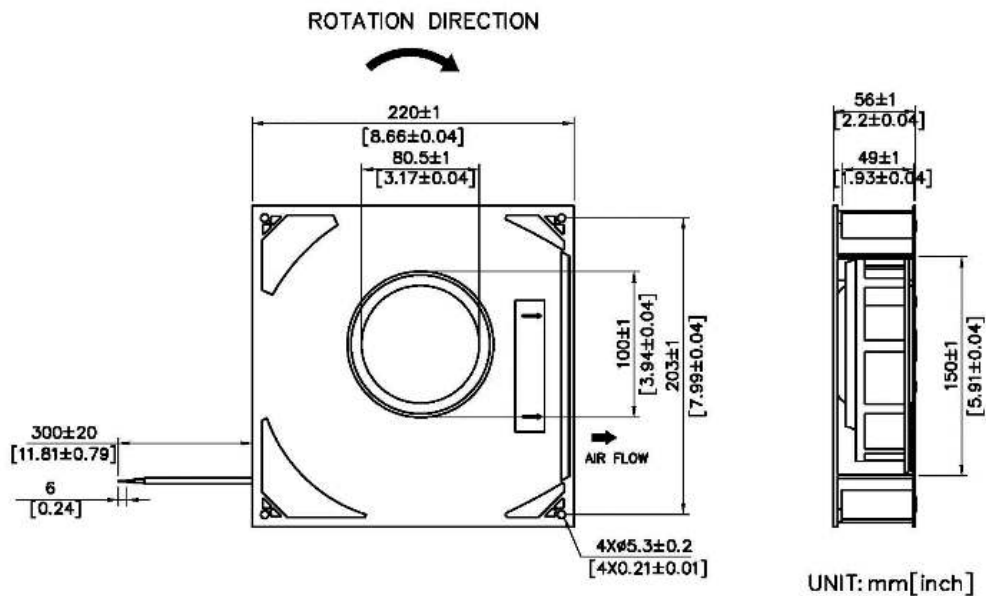

AIR PERFORMANCE

