


# AB

# 22056-F

220x220x56mm(8.66"x8.66"x2.2")

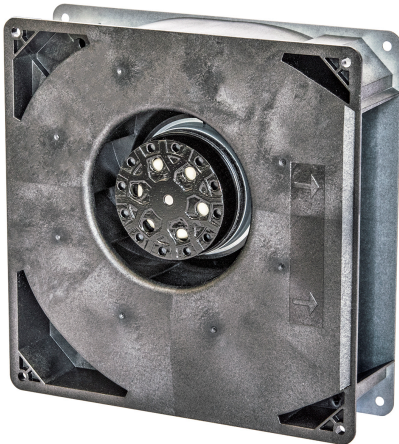

|                         |                                                                      |
|-------------------------|----------------------------------------------------------------------|
| HOUSING                 | Plastic(PC+20% glass fiber)+Metal Piece                              |
| IMPELLER                | Plastic PA. Covering Glass Fiber                                     |
| BEARING                 | Ball or Sleeve                                                       |
| OPERATING TEMPERATURE   | -10°C to + 70°C                                                      |
| INSULATION              | Class B                                                              |
| OPERATING VOLTAGE RANGE | 103 VAC to 106 VAC for 115V Type<br>207 VAC to 253 VAC for 230V Type |
| DIELECTRIC STRENGTH     | 5mA Max. at 1500 VAC for 1 second                                    |
| INSULATION RESISTANCE   | 10M $\Omega$ min. @500 VDC                                           |
| MOTOR TYPE              | Shaded Pole Motor                                                    |
| SAFETY                  | Thermally Protected                                                  |
| TERMINATION             | Lead Wire                                                            |
| WEIGHT                  | 1.73kg                                                               |
| ROHS COMPLIANCE         | Yes                                                                  |
| IP LEVEL                | IP21 (Special IP Rating On Request)                                  |


# 220

mm

## SPECIFICATION

| MODEL NO.      | RATED VOLTAGE(V) | RATED CURRENT(A) | INPUT POWER(W) | SPEED (RPM) | MAX. AIR PRESSURE |       | MAX. AIR FLOW |         | NOISE dB(A) @1M |
|----------------|------------------|------------------|----------------|-------------|-------------------|-------|---------------|---------|-----------------|
|                |                  |                  |                |             | inchH2O           | mmH2O | CFM           | m3/min  |                 |
| AB22056V1HBL-F | 115              | 0.70/0.60        | 50/52          | 2700/2900   | 1.3/1.8           | 33/46 | 118/126       | 3.3/3.6 | 63/65           |
| AB22056V2HBL-F | 230              | 0.40/0.30        | 50/53          | 2700/2900   | 1.3/1.8           | 33/46 | 118/126       | 3.3/3.6 | 63/65           |

## DIMENSION

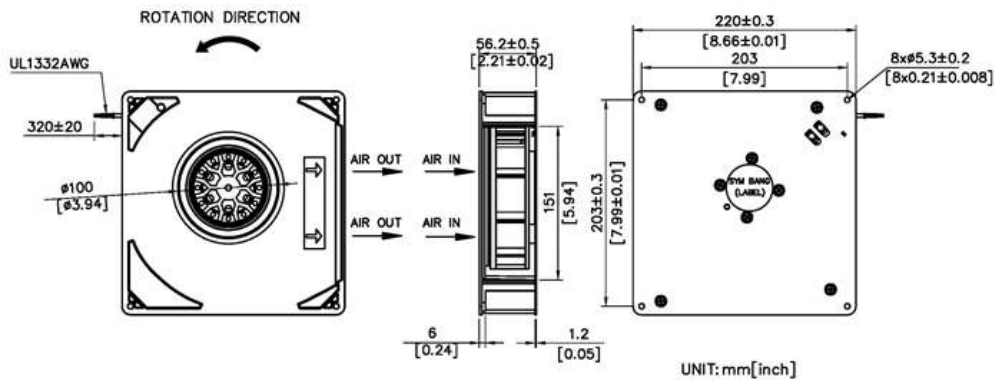

SYMBANG

## AIR PERFORMANCE

