


DCF

13391

CE

Ø133x91mm(Ø5.23"x3.58")

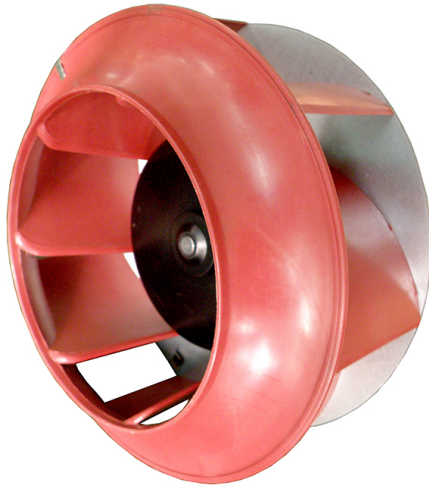


MOTOR	Outer rotor motor Ø72mm
IMPELLER	Plastic Impeller, Metal Plate
BEARING	Ball
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-20°C to + 60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	740g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

133mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCF13391V24H	24	1.6	38.4	4000	1.55	39.39	210.6	5.71	65
DCF13391V48SH	48	1.3	62.4	4500	1.97	49.92	230.8	6.53	68
DCF13391V48H	48	0.8	38.3	4000	1.55	39.39	210.6	5.71	65

DIMENSION

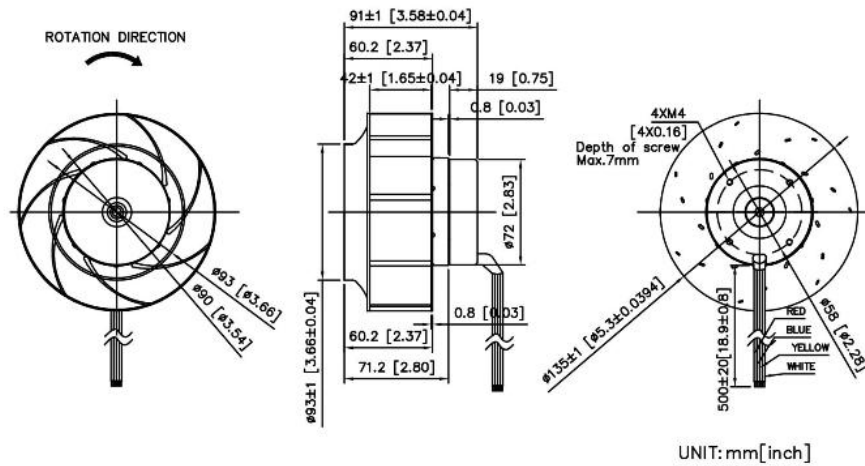

Wiring Diagram

- Red — +VDC
- Blue — GND
- Yellow — 0–10V/PWM Speed Control
- White — Tachometer (FG)

AIR PERFORMANCE

