

DCF

17568-PB

CE

Ø175x68mm(Ø6.85"x2.68")




MOTOR	Outer rotor motor Ø72mm
IMPELLER	Plastic Impeller
BEARING	Ball
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-20°C to + 60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	780g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

175mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCF17568V24SL-PB	24	3.5	75	3900	2.56	65.02	409	11.57	72
DCF17568V24H-PB	24	1.4	34	3100	1.58	40.13	333	9.42	65
DCF17568V48SL-PB	48	1.8	75	3900	2.56	65.02	409	11.57	72
DCF17568V48H-PB	48	0.7	34	3100	1.58	40.13	333	9.42	65

DIMENSION

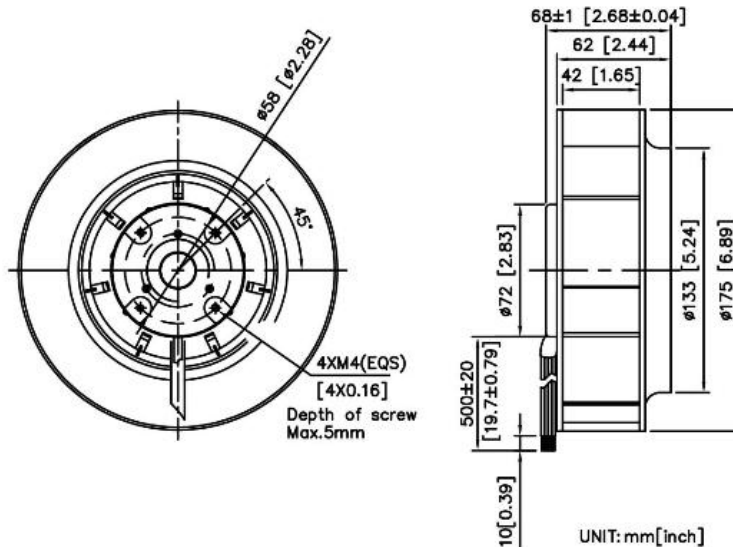

Wiring Diagram

Red	+VDC
Blue	GND
Yellow	0-10V/PWM Speed Control
White	Tachometer (FG)

SYMBANG

AIR PERFORMANCE

