

DCF

17569-B

CE

Ø175x69mm(Ø6.89"x2.72")




MOTOR	Outer rotor motor Ø72mm
IMPELLER	Plastic Impeller, Metal Plate
BEARING	Ball
OPERATING TEMPERATURE	-25°C to + 65°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	800g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

175mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCF17569V24HB-B	24	2.9	70	4000	2.17	55	394	11.15	70
DCF17569V24M-B	24	1.7	41	3100	1.41	35.7	335	9.49	68
DCF17569V48HB-B	48	1.6	78	4000	2.17	55	394	11.15	66
DCF17569V48MB-B	48	0.7	36	3100	1.41	35.7	335	9.48	68

DIMENSION

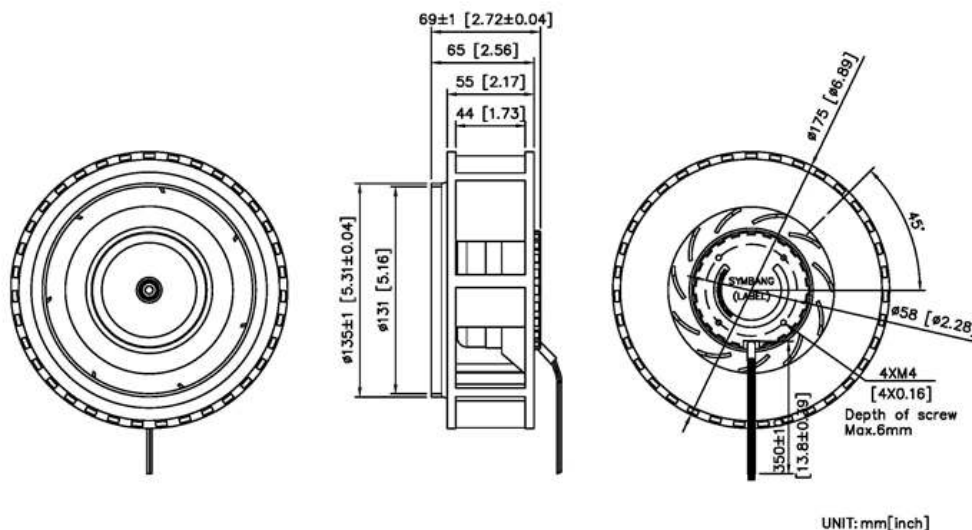

Wiring Diagram

Red — +VDC
Black — GND
Blue — PWM Speed Control
Yellow — Tachometer (FG)

SYMBANG

AIR PERFORMANCE

