

DCF

22071-PB

CE

Ø220x71mm(Ø8.66"x2.8")




MOTOR	Outer rotor motor Ø92mm
IMPELLER	Plastic Impeller
BEARING	Ball
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-20°C to +60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	1.35 Kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

220mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCF22071V24H-PB	24	4.42	106	3150	2.81	71.37	621	17.57	76
DCF22071V48H-PB	48	2.08	100	3100	2.81	71.37	597	16.89	76

DIMENSION

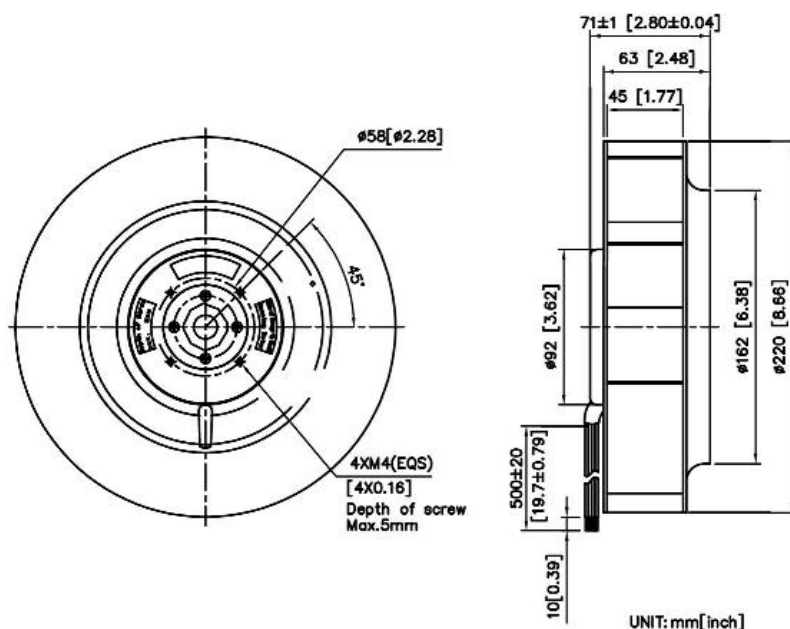

Wiring Diagram

- Red — +VDC
- Blue — GND
- Yellow — 0-10V/PWM Speed Control
- White — Tachometer (FG)

AIR PERFORMANCE

